



LOGI DOCK

Setup Guide 设置指南

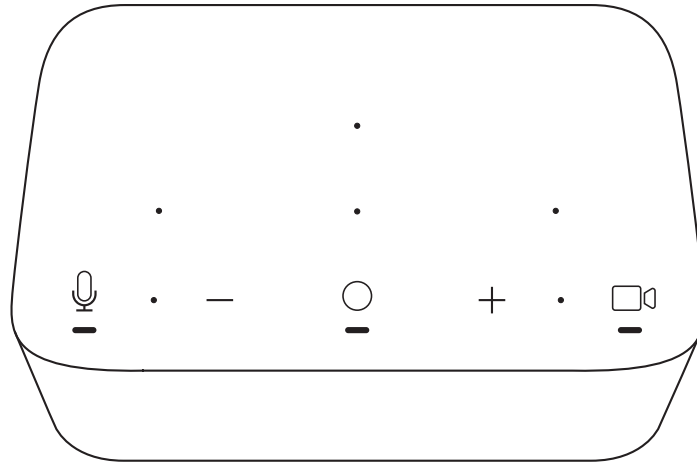

UC VERSION
UC 版

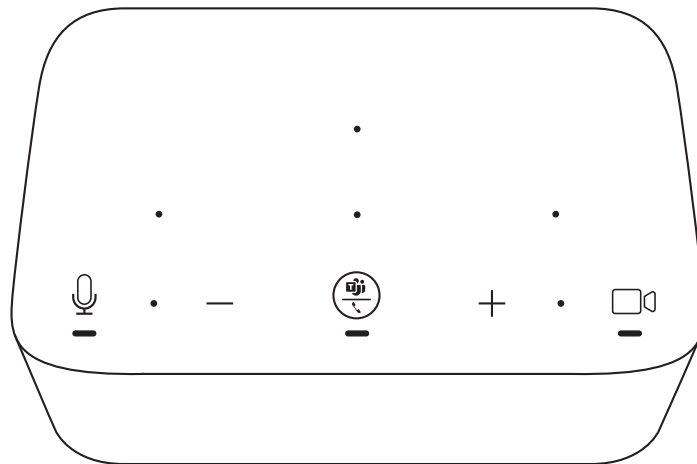


TEAMS VERSION
TEAMS 版

CONTENTS


English	3	简体中文	12
-------------------	---	----------------	----

KNOW YOUR PRODUCT


UC VERSION

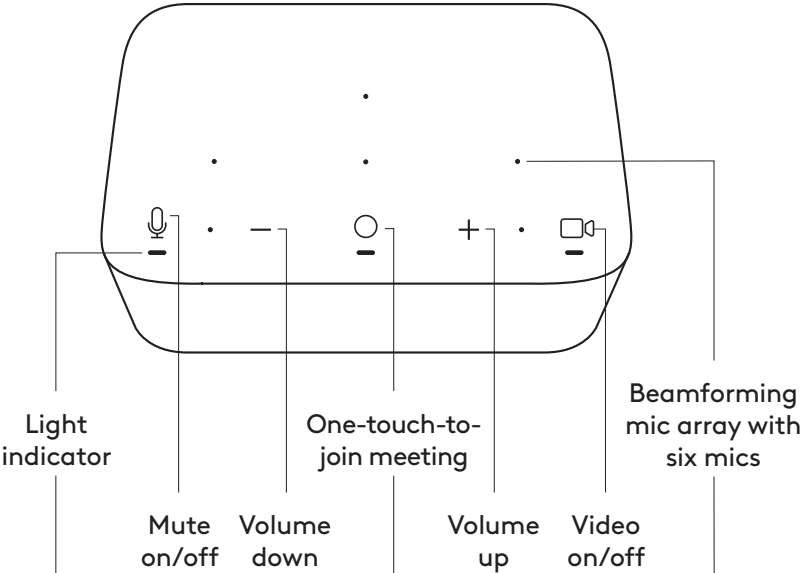

TEAMS VERSION

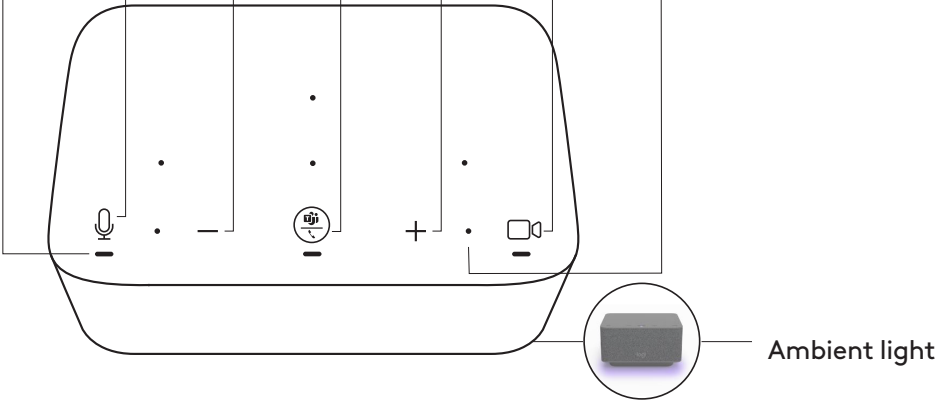


BACK VIEW

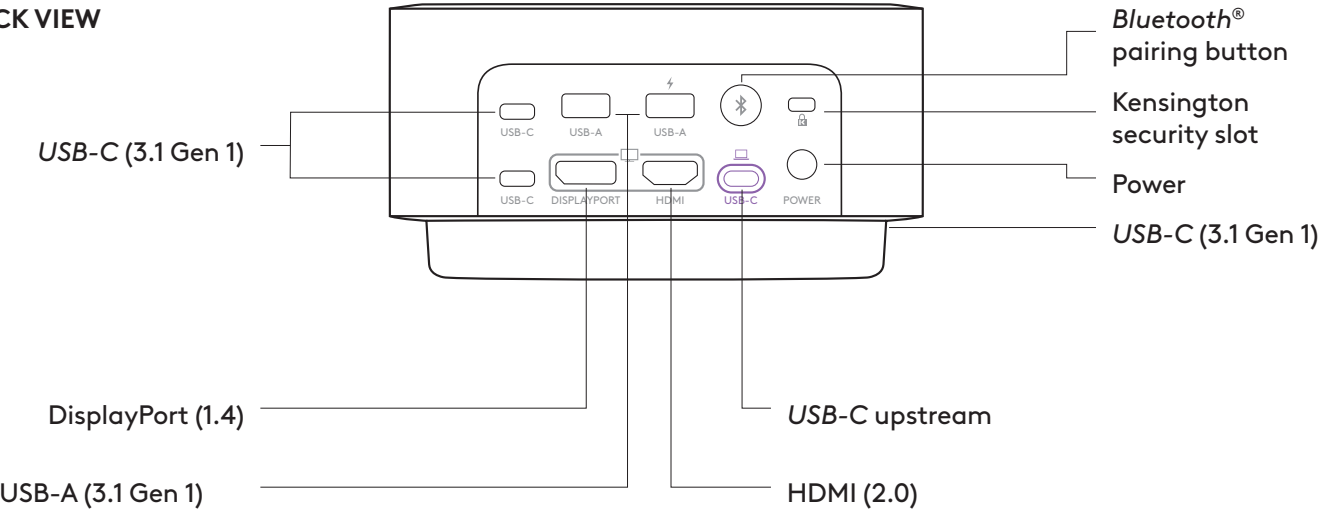


WHAT'S IN THE BOX

1. Logi Dock
2. Power supply (1.6 m)
3. AC power cord (1.7 m)
4. *USB-C* to *USB-C* cable (1 m)
5. User documentation

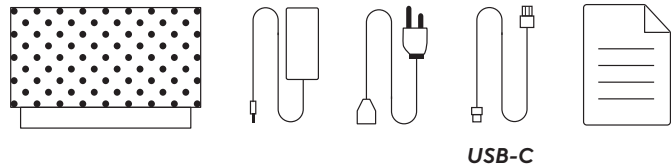

CONNECTING TO POWER

1. Connect one end of the AC power cord to the power supply, and connect another end to an outlet.
2. Connect the power supply to the AC power port on the docking station.

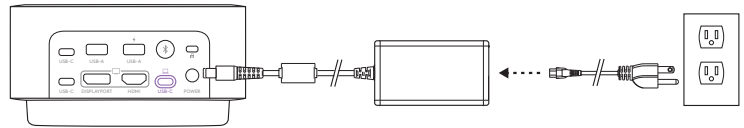


CONNECTING VIA *USB-C* CABLE

Connect one end of the *USB-C* cable to the *USB-C* upstream port on Logi Dock, and connect another end to the *USB-C* port on your computer.



LOGI TUNE APP

Download and install Logi Tune from www.logitech.com/tune for calendar integration with Google Calendar and Office 365, and one-touch meeting controls.

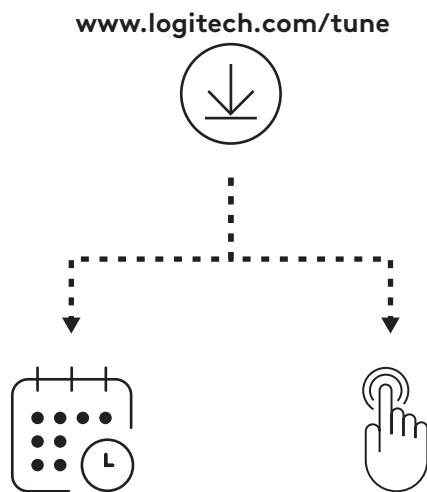

CALENDAR INTEGRATION

1. Open Logi Tune app on your computer.
2. Link your preferred calendar and authenticate with your calendar provider. Then follow the steps in the app.
3. Your agenda will show up in the dashboard upon successful link.


ONE-TOUCH MEETING CONTROLS

1. Link your calendar with Logi Tune.
2. Make sure Tune is running in the background. You can see the app in the taskbar if Tune is active.
3. One-touch-to-join will be activated by default.
4. To deactivate, visit device settings in the Tune app.

MEETING CONTROLS AND INDICATOR LIGHT

UC version				
Button	Usage		Indicator light	Action
	Mute	Mute on	Solid RED	Short press
		Mute off	Solid WHITE	
	Call Controls	Idle state	-	Short press to invoke / close Tune
		Time of meeting	Flashing PURPLE	-
		Incoming call	Flashing WHITE	Short press to answer call
				2 seconds press to reject call
		Active call	Solid WHITE	Short press to end call
+	Volume	Volume up	-	Short press
-		Volume down		
	Video	Video on	Solid WHITE	Short press
		Video off	Solid RED	


- Note:**
- When the Zone Wireless (Plus) headset or Zone True Wireless earbuds are connected to Logi Dock, both speakerphone and headset status will be in sync.
 - Mute indicator light is available when Logi Dock, Zone Wireless (Plus) headset or Zone True Wireless earbuds are the audio source. Video indicator light is available for UC or Teams-certified devices only.

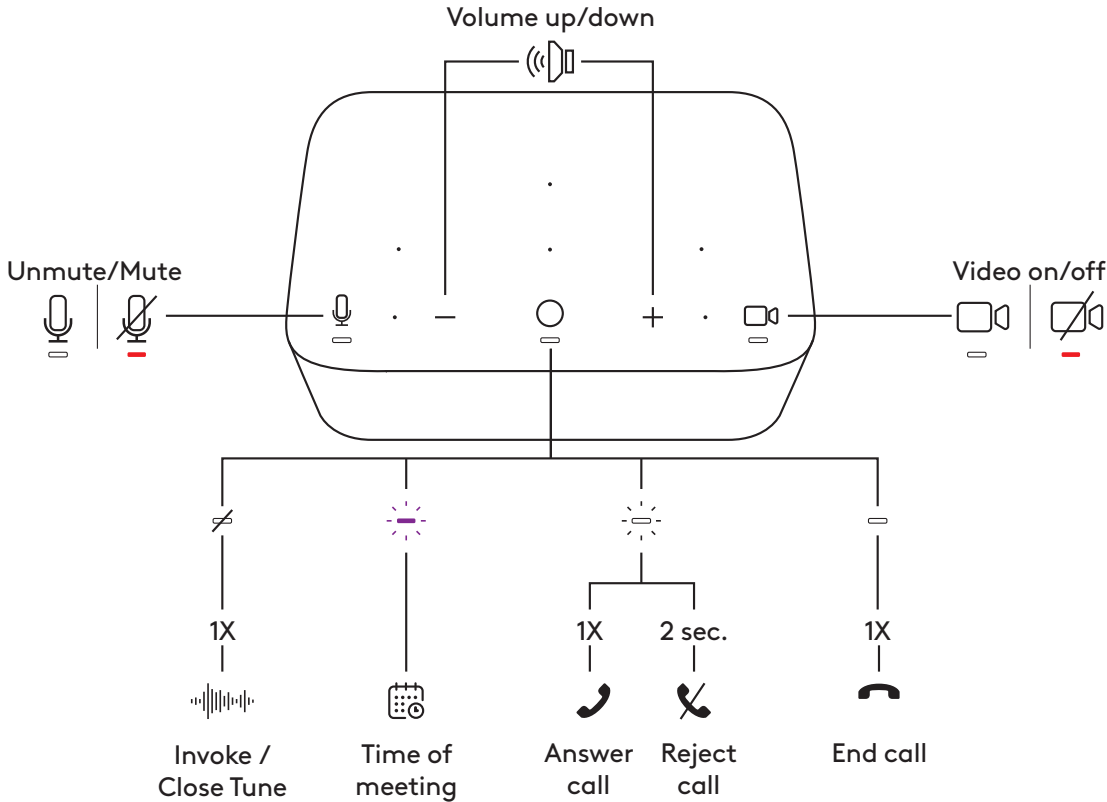



TEAMS version				
Button	Usage		Indicator light	Action
	Mute	Mute on	Solid RED	Short press
		Mute off	Solid WHITE	
	Call Controls	Incoming call	Flashing WHITE	Short press to answer call
				2 seconds press to reject call
		Active call	Solid WHITE	Short press to end call
	Teams Activities	Idle state	Solid PURPLE	Short press to invoke Teams
		Active call		Short press to transfer audio from other active device*
				2 seconds press to invoke Teams feature**
		Teams notification	Flashing PURPLE	Short press to clear notification event
+	Volume	Volume up	-	Short press
-		Volume down		
	Video	Video on	Solid WHITE	Short press
		Video off	Solid RED	

Note:

- Teams activities are only functional when Teams is running on an unlocked PC or Mac.
- When the Zone Wireless (Plus) headset or Zone True Wireless earbuds are connected to Logi Dock, both speakerphone and headset status will be in sync.
- Mute indicator light is available when Logi Dock, Zone Wireless (Plus) headset or Zone True Wireless earbuds are the audio source. Video indicator light is available for UC or Teams-certified devices only.
- *If Zone Wireless (Plus) headset or Zone True Wireless earbuds are connected directly to Logi Dock and you are in an active call, a single press on Logi Dock will end the call instead of transferring an active call.
- **Refer to www.logitech.com/support/Logi-Dock-compatibility for the latest Teams feature updates

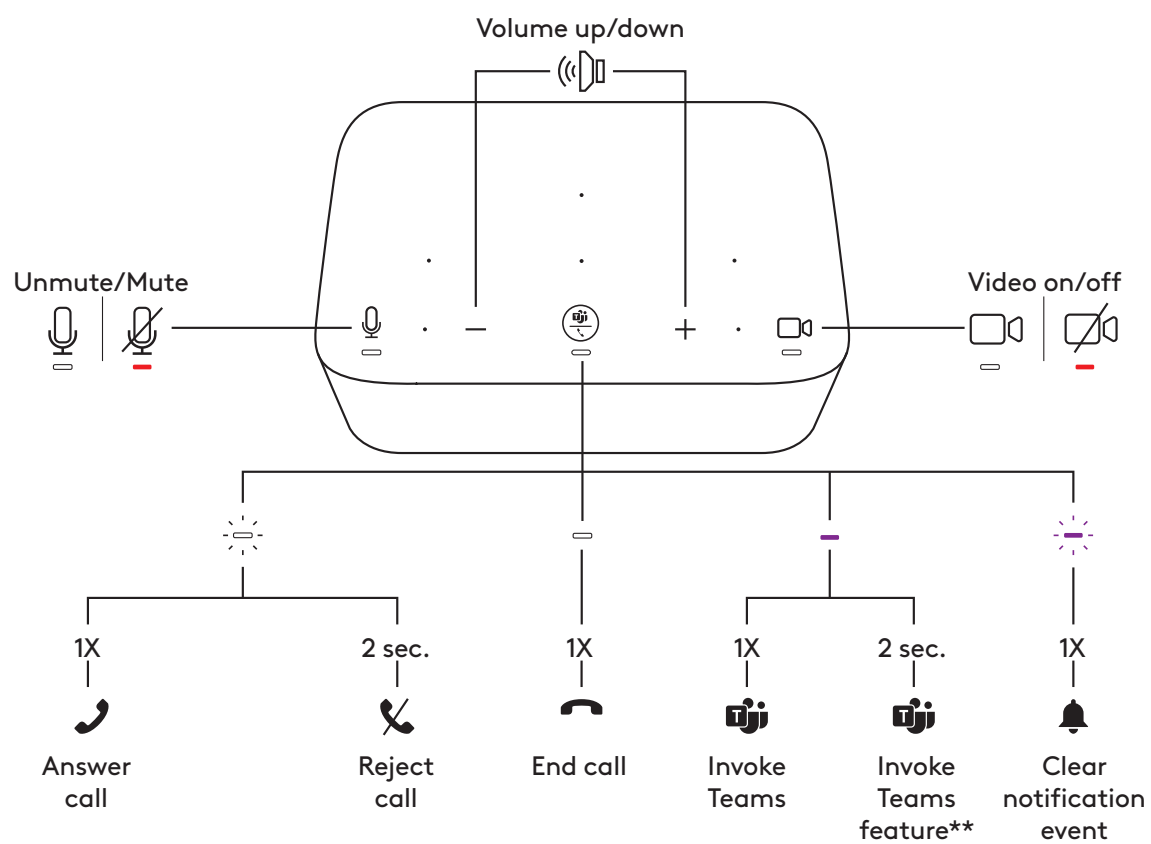

AMBIENT LIGHT

UC version/TEAMS version			
			
	Left	Middle	Right
Calendar entry			
Time of the meeting			
Incoming call			
On call			
Mute on			
Mute off			
Video on			
Video off			
Bluetooth® pairing			
Pairing mode			
Paired		 5 sec.	

Note:

- Ambient light (for mute) is available when Logi Dock, Zone Wireless (Plus) headset or Zone True Wireless earbuds are the audio source. Ambient light (for video) is available for UC or Teams-certified devices only.


Tip:

- Ambient light customization available on Logi Tune.

CONNECTING USB DEVICES


- Logi Dock has 5 USB ports: 2 USB-A and 2 *USB-C* ports on the back panel; 1 *USB-C* port on the side.
- Simply connect your external USB devices such as a keyboard and mice with the USB-A or C ports.

Note: Please charge your iOS device via USB-A or C ports with charging port icon (⚡) only when the Logi Dock is disconnected from the laptop.

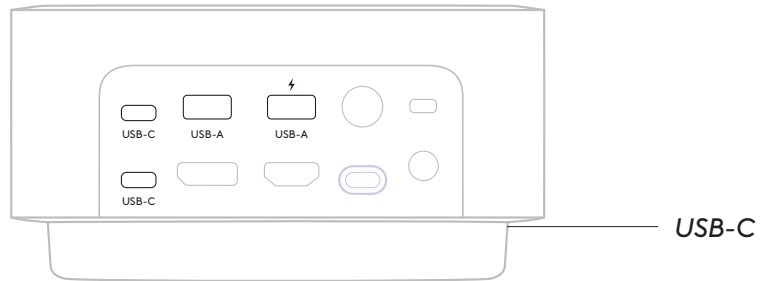

CONNECTING *BLUETOOTH*®-ENABLED MOBILE DEVICES


1. Press the *Bluetooth*® pairing button at the back panel for 3 seconds. The ambient light in front will blink blue.
2. Open *Bluetooth*® settings on your mobile device.
3. Select Logi Dock in discoverable devices.
4. Once successfully paired, the ambient light will turn solid blue for 5 seconds with sonification.

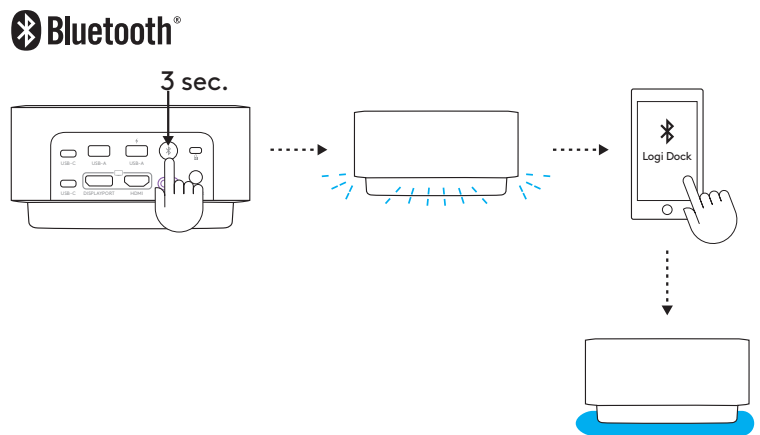

CONNECTING A DISPLAYPORT DEVICE

To connect your DisplayPort video device (such as monitor, projector) to Logi Dock, insert the DisplayPort cable* to DisplayPort on the back panel.


* DisplayPort cable is not included.

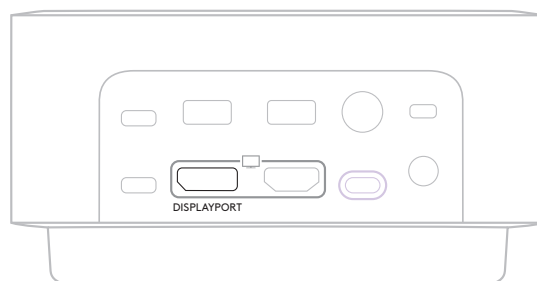

CONNECTING A HDMI DEVICE

To connect your HDMI video device (such as monitor, projector) to Logi Dock, insert the HDMI cable* to HDMI port on the back panel.

* HDMI cable is not included.

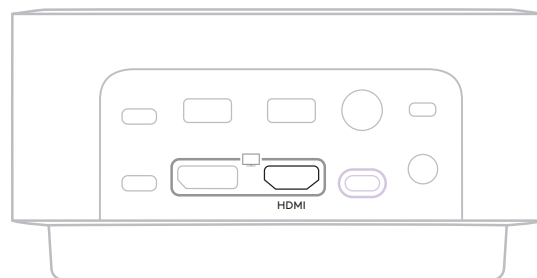


USING A KENSINGTON LOCK

To secure Logi Dock with a Kensington lock:

1. Wrap one end of the security cable around a secured object.
2. Insert the key into the cable lock.
3. Insert the cable lock into the Kensington security slot at the back panel. Turn and remove the key.

* Kensington lock and keys are not included.

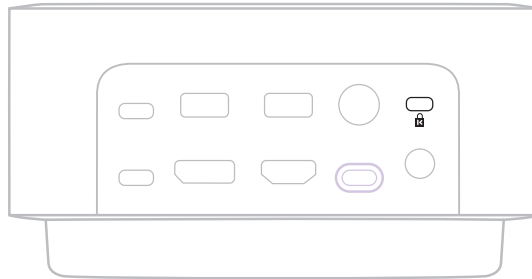

DIMENSIONS

Height x Width x Depth: 84.8 mm x 160.0 mm x 131.5 mm

Weight: 0.942 kg

SYSTEM REQUIREMENTS

Works with common calling applications across almost all platforms and operating systems.

Works with *Windows* 10 or later, *macOS* 11 or later, or *Chrome* based computer via *USB-C* with *Alt Mode* and *iOS* or *Android* based mobile devices via *Bluetooth®*.

TECHNICAL SPECIFICATIONS

Microphone type: Six beamforming mics with advanced algorithms

Frequency response (Speaker): 60 Hz - 20 kHz

Frequency response (Microphone): 65 Hz - 8 kHz

Wireless range: Up to 30 m / 100 ft (open field line of sight)

Power to system: Up to 100 watt charging

Cable length (*USB-C* to *C* cable): 3.3 ft (1 m)


Cable length (*AC* power cord): 5.6 ft (1.7 m)

Cable length (Powers supply): 5.2 ft (1.6 m)


www.logitech.com/support/logidock

了解您的产品


UC 版

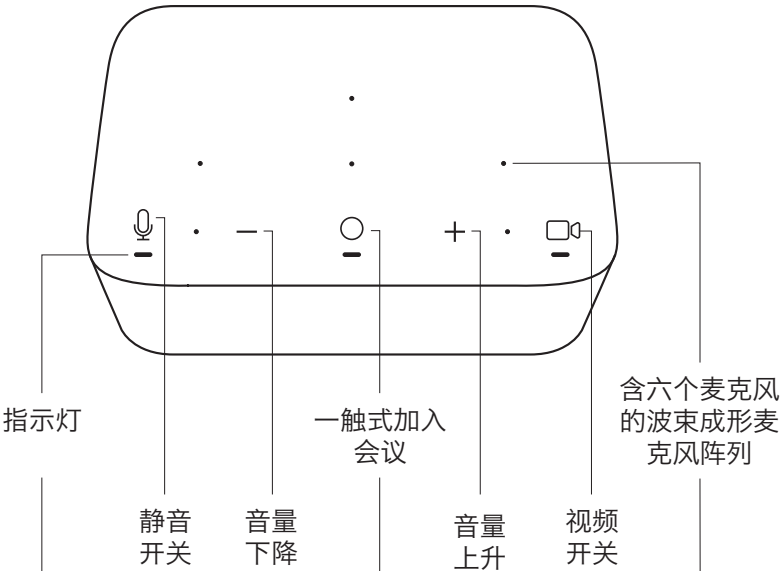

TEAMS 版

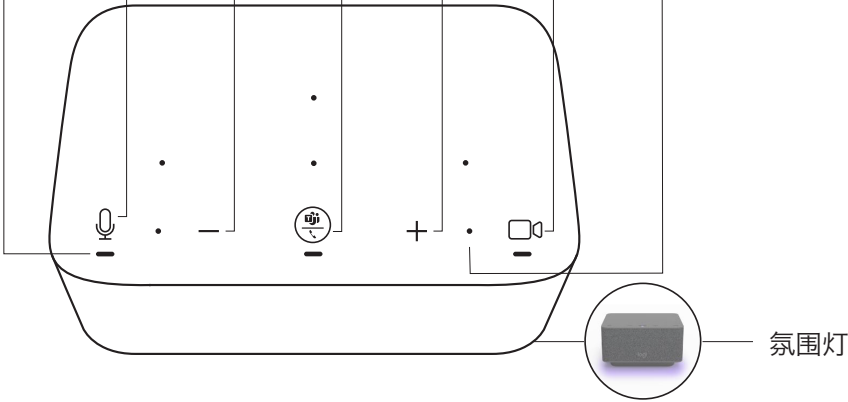


后视图

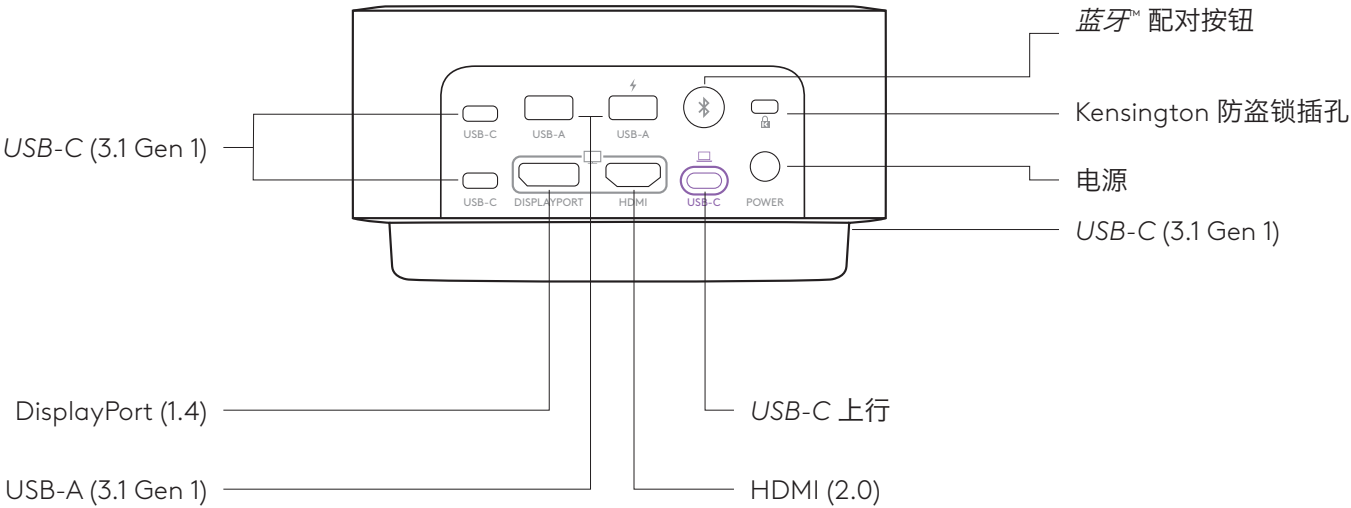


包装内容

1. Logi Dock
2. 电源 (约 1.6 米)
3. 交流电源线 (约 1.7 米)
4. USB-C 至 USB-C 线缆 (约 1 米)
5. 用户文档

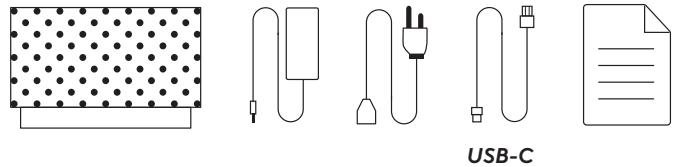

连接电源

1. 将交流电源线的一端连接到电源，另一端连接到插座。
2. 将电源连接到扩展坞的交流电源端口。

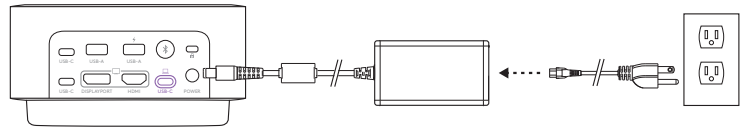


通过 USB-C 线缆连接

将 USB-C 线缆的一端连接到 Logi Dock 的 USB-C 上行端口，另一端连接到电脑的 USB-C 端口。



LOGI TUNE 应用程序

从 www.logitech.com/tune 下载并安装 Logi Tune，从而实现与 Google 日历和 Office 365 的日历集成以及一触式会议控制。

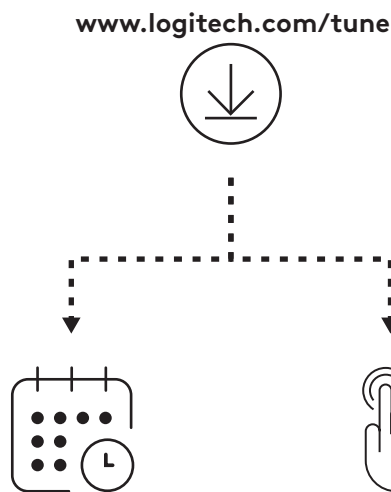

日历整合

1. 在您的电脑上打开 Logi Tune 应用程序。
2. 链接您的首选日历并与您的日历提供商进行身份验证。然后按照应用程序中的步骤操作。
3. 成功链接后，您的议程将显示在仪表板中。


一触式会议控制

1. 将您的日历与 Logi Tune 相链接。
2. 确保 Tune 正在后台运行。如果 Tune 处于活动状态，您可以在任务栏中看到该应用程序。
3. 一触式加入将被默认激活。
4. 要停用此功能，请访问 Tune 应用程序中的设备设置。

会议控制和指示灯

UC 版				
按钮	使用		指示灯	操作
	静音	开启静音	常亮红色	短按
		取消静音	常亮白色	
	通话控制	闲置状态	-	短按调用/关闭 Tune
		会议时间	闪烁紫色	-
		通话呼入	闪烁白色	短按接听通话
				按住 2 秒拒绝通话
		活动通话	常亮白色	短按结束通话
+	音量	音量上升	-	短按
-		音量下降		
	视频	视频开启	常亮白色	短按
		视频关闭	常亮红色	


- 注：
- 当 Zone Wireless (Plus) 耳机麦克风或 Zone True Wireless Earbuds 连接到 Logi Dock 时，扬声器和耳机麦克风状态将同步。
 - 当 Logi Dock、Zone Wireless (Plus) 耳机麦克风或 Zone True Wireless Earbuds 为音频源时，静音指示灯可用。视频指示灯仅适用于 UC 或 Teams 认证的设备。

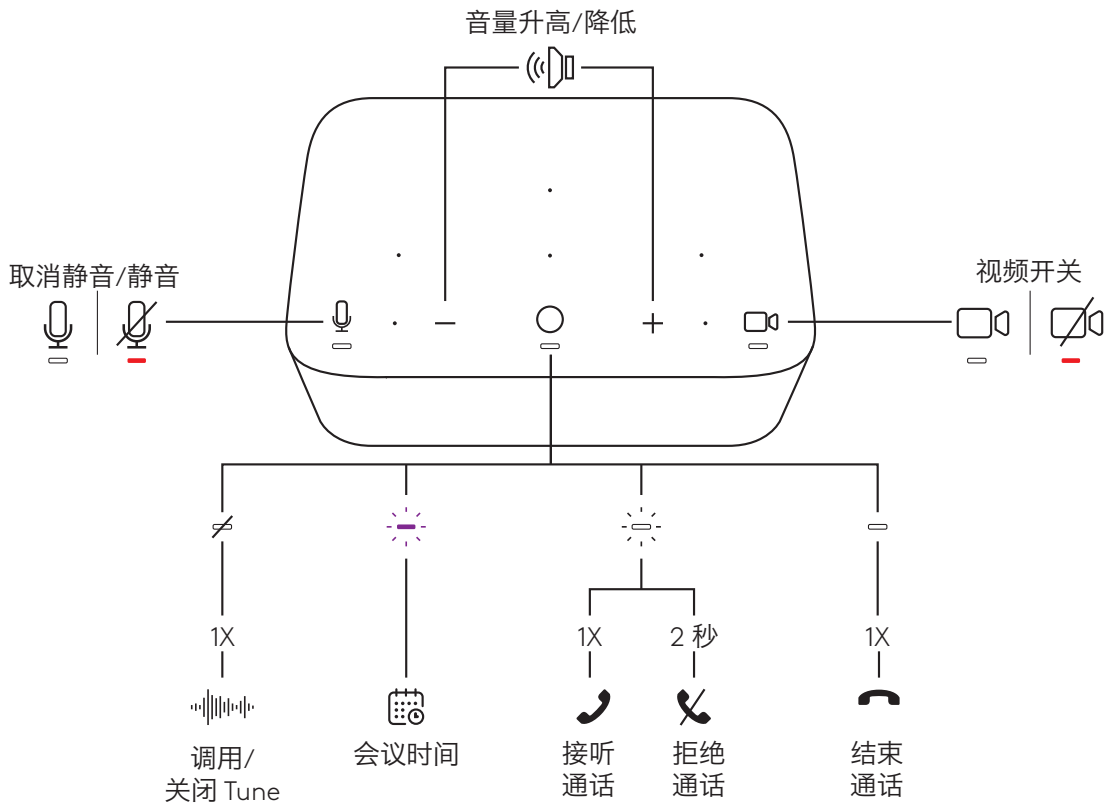



TEAMS 版				
按钮	使用		指示灯	操作
	静音	开启静音	常亮红色	短按
		取消静音	常亮白色	
	通话控制	通话呼入	闪烁白色	短按接听通话
		活动通话	常亮白色	按住 2 秒拒绝通话
		Teams 行为	常亮紫色	短按结束通话
	Teams 行为	闲置状态	常亮紫色	短按调用 Teams
		活动通话		短按从其他活动设备传输音频*
		Teams 通知		按住 2 秒调用 Teams 功能**
+	音量	音量上升	-	短按
-		音量下降		
	视频	视频开启	常亮白色	短按
		视频关闭	常亮红色	

注:

- 仅当 Teams 运行于未锁定的 PC 或 Mac 上时，Teams 行为才有效。
- 当 Zone Wireless (Plus) 耳机麦克风或 Zone True Wireless Earbuds 连接到 Logi Dock 时，扬声器和耳机麦克风状态将同步。
- 当 Logi Dock、Zone Wireless (Plus) 耳机麦克风或 Zone True Wireless Earbuds 为音频源时，静音指示灯可用。视频指示灯仅适用于 UC 或 Teams 认证设备。
- *如果 Zone Wireless (Plus) 耳机麦克风或 Zone True Wireless Earbuds 直接连接 Logi Dock 并且您正在通话中，则按一下 Logi Dock 将结束通话而不是转移活动通话。
- **最新的 Teams 功能更新请参阅 www.logitech.com/support/Logi-Dock-compatibility

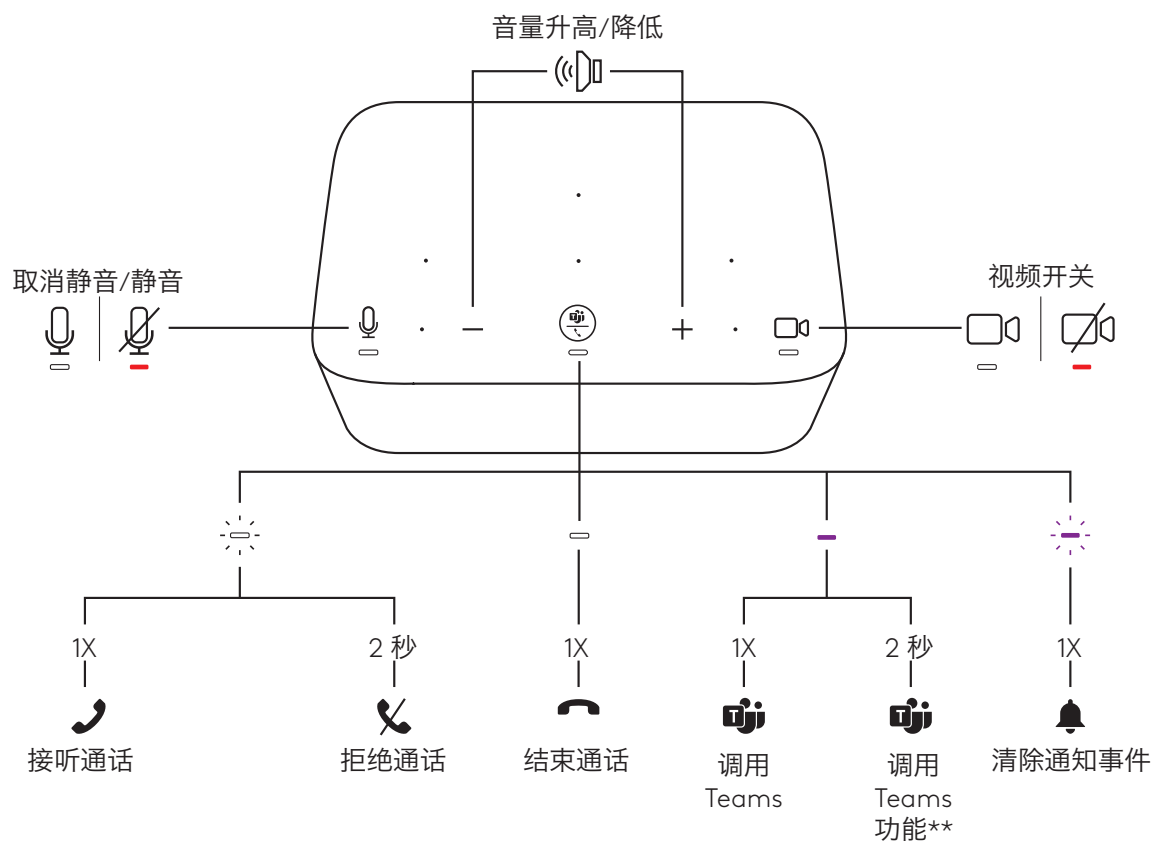

氛围灯

UC 版/TEAMS 版			
			
	左	中	右
日历条目			
会议时间			
通话呼入			
通话中			
静音开启			
取消静音			
视频开启			
视频关闭			
蓝牙™ 配对			
配对模式			
已配对		 5 秒	


注：
- 当 Logi Dock、Zone Wireless (Plus) 耳机麦克风或 Zone True Wireless Earbuds 为音频源时，（静音）氛围灯可用。（视频）氛围灯仅适用于 UC 或 Teams 认证设备。

提示：
- Logi Tune 提供氛围灯自定义功能。

连接 USB 设备


- Logi Dock 有 5 个 USB 端口：后面板上 2 个 USB-A 和 2 个 USB-C 端口；侧面 1 个 USB-C 端口。
- 方便地通过 USB-A 或 C 端口连接键盘和鼠标等外部 USB 设备。

注：当 Logi Dock 与笔记本电脑断开连接时，请仅通过带充电端口图标 (⚡) 的 USB-A 或 C 端口为您的 iOS 设备充电。

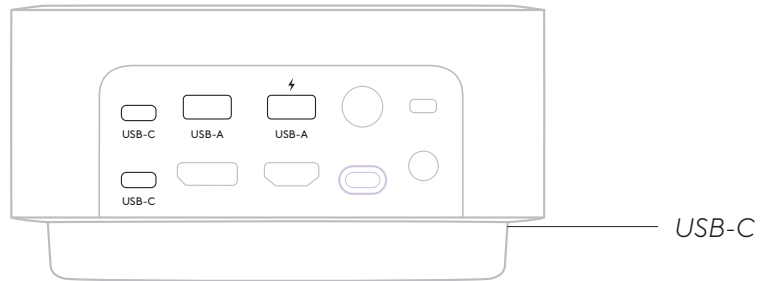

连接蓝牙™ 设备


1. 按住后面板上的蓝牙™ 配对按钮 3 秒钟。前方的氛围灯将闪烁蓝色。
2. 在你的移动设备上打开蓝牙™ 设置。
3. 在可发现设备中选择 Logi Dock。
4. 成功配对后，氛围灯将常亮蓝色 5 秒，并伴有声音提示。

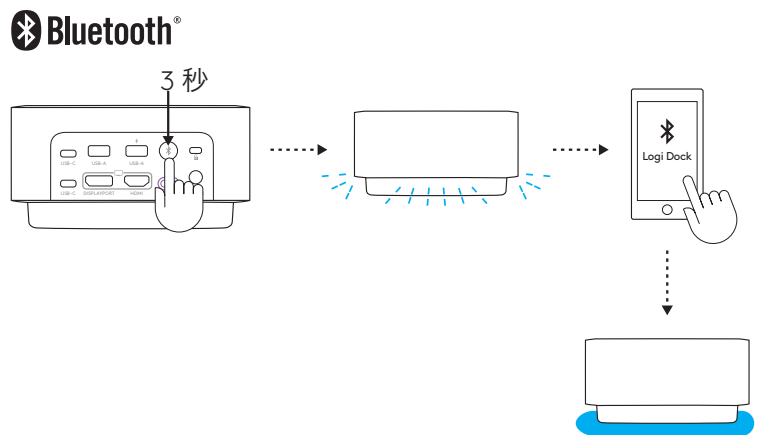

连接 DISPLAYPORT 设备

要将 DisplayPort 视频设备（如显示器、投影仪）连接到 Logi Dock，请将 DisplayPort 线缆*插入后面板的 DisplayPort 端口。


* DisplayPort 线缆需另购。

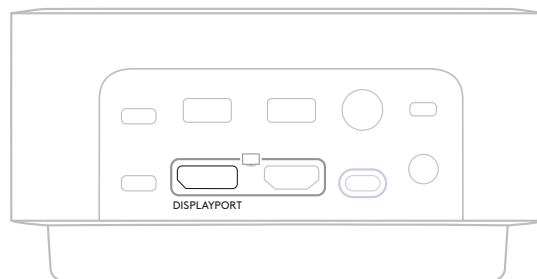

连接 HDMI 设备

要将 HDMI 视频设备（如显示器、投影仪）连接到 Logi Dock，请将 HDMI 线缆*插入后面板的 HDMI 端口。

* HDMI 线缆需另购。

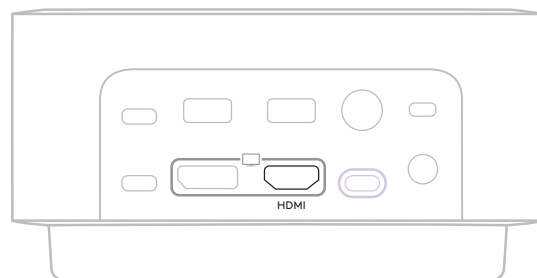


使用 KENSINGTON 锁

要使用 Kensington 锁保护 Logi Dock：

1. 将防盗线缆的一端缠绕在稳固的物体上。
2. 将钥匙插入钢缆锁。
3. 将钢缆锁插入后面板上的 Kensington 防盗锁插槽。转动并取下钥匙。

*Kensington 锁和钥匙需另购。

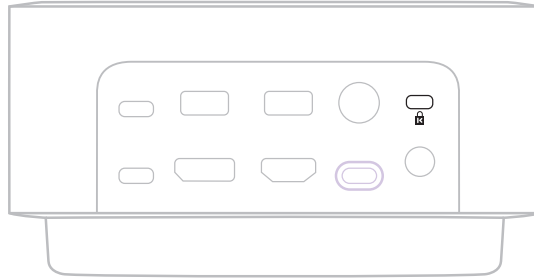

规格

高 x 宽 x 深：约 84.8 毫米 x 约 160.0 毫米 x 约 131.5 毫米

重量：约 0.942 千克

系统要求

兼容多数平台和操作系统的常用通话应用程序。

通过支持 Alt 模式的 USB-C 支持 Windows 10 或更高版本、macOS 11 或更高版本或 Chrome 电脑，通过蓝牙™ 支持 iOS 或 Android 移动设备。

技术规格

麦克风类型：六个采用高级算法的波束成形麦克风

频率响应（扬声器）：60 Hz - 20 kHz

频率响应（麦克风）：65 Hz - 8 kHz

无线接收范围：最远 30 米（无遮挡）

无线接受范围依运行环境和设置而异。

系统供电：以高达 100W 的功率充电

无线接受范围依运行环境和设置而异。

线缆长度（USB-C 至 C 线缆）：约 1 米

线缆长度（交流电源线）：约 1.7 米

线缆长度（电源）：约 1.6 米

www.logitech.com/support/logidock