


# ENABLE EVERY ROOM. ENABLE EVERY PERSON.



## Logitech® ConferenceCam CC3000e

The Logitech® ConferenceCam CC3000e combines breakthrough affordability and professional audio and video to turn any meeting space into a video-enabled collaboration place. By using your familiar computing environment and VC application of choice, the CC3000e is plug-and-play and easy to deploy. Workgroups of 6-10 people can now experience the productivity benefits of crystal-clear face-to-face communication.

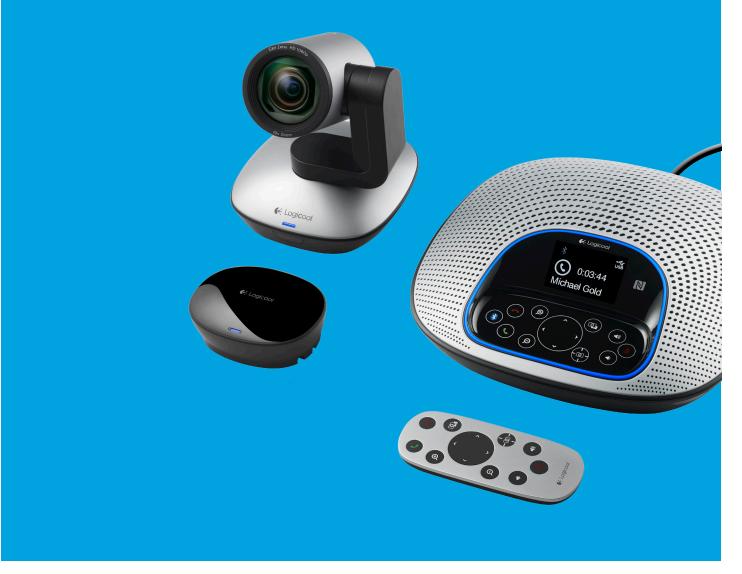



BlueJeans







cisco Compatible

## Logitech ConferenceCam CC3000e

#### VIDEO

#### HD 1080p video quality at 30 frames-per-second

Brings life-like full HD video to conference calls, enabling expressions, non-verbal cues and movements to be seen clearly.

#### H.264 UVC 1.5 with Scalable Video Coding (SVC)

Frees up PC bandwidth by putting video processing within the camera, adjusting dynamically to the available bitstream. The result is a smoother video stream in applications like Microsoft® Lync™ 2013.

#### 90-degree field of view with mechanical

260-degree pan and 130-degree tilt The generously wide field of view and silky smooth pan and tilt controls enhance collaboration by making it easy to see everyone in the room.

#### 10x lossless zoom

Zero in on close-ups of objects and whiteboard content with outstanding detail and clarity.

#### ZEISS<sup>®</sup> lens certified

High-precision lens automatically focuses on people and objects to deliver razor-sharp resolution wherever the lens is pointed.

#### Far-end camera control

Operate camera pan, tilt and zoom functions of another Logitech ConferenceCam in the remote location.1

#### AUDIO

#### Omni-directional full duplex mics

Conference participants can clearly converse from a 20-foot diameter around the base, making it seem like conversations are happening in the same room.

Acoustic echo cancellation and noise-cancelling Optimized to hear and be heard even in noisy environments.

### Wideband audio supporting stereo or

mono audio modes

True wideband audio enables people on both sides of the call to enjoy a life-like communication experience.

#### Touch controls

Provide excellent response for call answer/end<sup>2</sup>, volume, mute and other functions without transmitting audible noise through the audio path.

#### LCD displays Caller ID and other info

View call-related info<sup>2</sup> (caller ID, call duration, etc.) and speakerphone/camera function indicators (volume control, etc.) on LCD display screen.

#### Dockable remote control

Operate camera pan, tilt and zoom, volume up/down and answer/hang-up<sup>2</sup> functions on the base console or with remote control that docks in console when not in use.

LEDs for speakerphone streaming, mute, hold, and

#### CONNECTIVITY AND USAGE

#### Compatible with Mac<sup>®</sup> and PC

Employees simply connect a laptop of their choice to conduct life-like meetings within their own familiar computing environment.

#### USB video/audio connectivity and Bluetooth® audio connectivity with NFC (Near Field Communication) pairing<sup>3</sup>

USB plug-and-play connectivity makes set-up with a laptop or thin client simple, or connect to a Bluetooth® device for professional audio calls. Easily pair NFC-enabled mobile devices to the CC3000e by simply touching them together.

### Optimized for Microsoft<sup>®</sup> Lync<sup>™</sup>, Cisco<sup>®</sup> compatible⁴ (with Jabber<sup>®</sup> and Webex<sup>®</sup>), works with Skype™, integrated with Vidyo<sup>®</sup>

Broad application compatibility ensures an integrated experience with most business-grade VC platforms.

#### Camera "Home" preset

User-defined preset returns camera to preferred viewing position upon wake-up.

#### Visual call status indicator

Onboard LEDs flash to provide a visual alerts and call status.

#### Kensington Security Slot

HUB/CABLE

components

camera/speakerphone

COMPLIANCE AND TOOLS

Downloadable diagnostic tool

AC Power adapter

USB 2.0 compliant

**INSIDE THE BOX** 

compatibility

Camera and speakerphone are each provisioned with Kensington Security Slots to help secure the equipment with anti-theft locks.

Central mountable hub for connection of all

Included adhesive solution for under-table mounting Two 16-foot cables for connection between hub and

UVC-compliant video and audio for broad application

Optimized for Microsoft® Lync™, Cisco® compatible,<sup>4</sup>

works with Skype™, integrated with Vidyo®

Field upgradeable firmware tool for PC or Mac Downloadable app plug-ins for advanced feature support for PC or Mac

Speakerphone, Camera, Remote Control, Powered

Speakerphone/Hub and Camera/Hub Connection, USB

cable for Hub/PC connection, Adhesive solution for hub mounting, power adapter, Quick Start Guide.

Hub, Wall/Table Mount, Two 16-foot cables for

One 10-foot USB cable for connection to PC/Mac

#### **TECH SPECIFICATIONS**

#### CAMERA

Smooth motorized pan, tilt and zoom, controlled from remote or console 260-degree pan, 130-degree tilt 10X lossless zoom 90-degree Field of View Full HD 1080p 30fps with onboard H.264 UVC 1.5 encoding Camera "Home" preset key Far-end control (PTZ) of ConferenceCam products ZEISS® Optics with autofocus Kensington Security Slot LED to confirm video streamina Standard tripod thread

#### **PRODUCT SPECIFICATIONS**

ConferenceCam CC3000e Price: \$999.99 Part #: 960-000982 UPC Code: 097855102096

#### SYSTEM REQUIREMENTS

Windows® 7 or 8 Mac OS® X 10.7 or higher Google Chromebook Version 29.0.1547.70, Platform 4319.79.0 For full HD support, please check with your software application provider for system requirements.

#### www.logitech.com/CC3000e

#### To order, contact your reseller or call us at 800-308-8666

Microphones (Tx) Two omni-directional microphones supporting 20-foot diameter range Frequency response: 100Hz - 7.75KHz Sensitivity: -28dB +/-3dB Distortion: <1% @ 1KHz at 65dB Speakers (Rx) Frequency response: 120Hz – 10KHz Sensitivity: 83dBSPL +/-3dB at 1W/1M Max output: 95dBSPL Distortion: <5% from 200Hz

#### Kensington Security Slot REMOTE CONTROL

SPEAKERPHONE

Bluetooth<sup>®</sup> pairing

Dockable remote control for all available functions 10-foot range remote control

#### **PRODUCT DIMENSIONS + WEIGHT**

## Camera

5.12 x 5.12 x 5.91" 590q/20.81oz

#### Speakerphone 240 x 240 x 68 mm 9.45 x 9.45 x 2.68" 810g/28.57oz

Hub 95 x 74 x 34 mm 3.74 x 2.91 x 1.34" 50g/1.76oz

latest version

50 x 120 x 9.8 mm

## 19.69 x 5.71 x 12.13'

Wall/Table Mount

255g/8.99oz

Logitech Inc. 7700 Gateway Blvd., Newark, CA 94560

<sup>1</sup> With Skype for Business, Microsoft® Lync™ and Vidyo

<sup>2</sup> With Skype T<sup>™</sup> and Vidyo deployments

<sup>4</sup> See www.logitech.com/ciscocompatibility for the

deployments: Lync requires plua-in download

With NFC-enabled mobile devices

#### © 2016 Logitech, Logitech, the Logitech logo and other Logitech marks are owned by Logitech and may be registered.

All other trademarks are the properties of their respective owners. Logitech assumes no responsibility for any errors that may appear in this publication. Product, pricing and feature information contained herein is subject to change without notice.

1.97 x 4.72 x 0.36" Package

8.27 x 4.72 x 3.90"

48g/1.69oz

3590g/126.63oz

130 x 130 x 150 mm

# Remote

## 500 x 145 x 300 mm

210 x 120 x 99 mm

WARRANTY

2-year limited hardware