



Ultrathin Keyboard Mini
iK700 mini超薄迷你键盘




Setup Guide | 设置指南

Contents / 目录

English	3	简体中文	11
www.logitech.com/support			19




Know your product

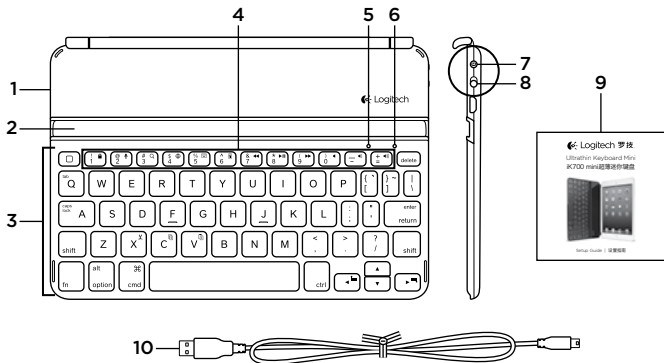

1. Protective cover
2. iPad mini holder
3. Keyboard
4. Function keys
5. Bluetooth® light

6. Status light
7. Bluetooth connect button
8. On/Off switch
9. Documentation
10. Micro-USB charging cable

Set up your product

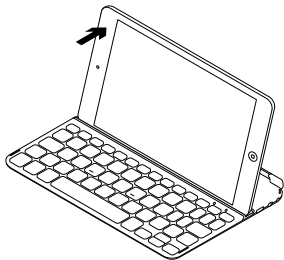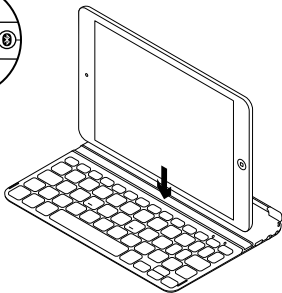

1. Turn on the Keyboard:


- Bluetooth discovery starts automatically and continues for 15 minutes. The Bluetooth light blinks.
- If the Status light briefly turns red, charge the batteries. For more information, see "Charge the batteries."

2. Make sure your iPad mini's Bluetooth feature is on. Select Settings > Bluetooth > On.

3. Select "Ultrathin Keyboard Mini" on the iPad mini's Devices menu.

- ### 4. If your iPad mini requests a PIN, enter the code using the Keyboard and not your iPad mini's virtual keyboard. After the Bluetooth connection is made, the Bluetooth light turns on, and then it turns off.
- ### 5. Place the iPad mini landscape on the Keyboard.

Charge the keyboard battery

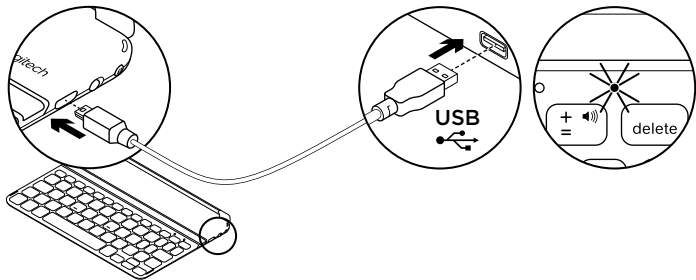

1. Plug one end of the micro-USB cable into the charging port, and the other end into a USB port on your computer.

Alternatively, you can use a 5V USB charger, such as that provided with your iPad mini, providing the power output rating is at least 500mA.

The status light blinks green as the battery charges.

2. Charge the battery until the Status light turns solid green.

Battery information:

- A fully charged battery provides about 3 months of power when the Keyboard is used about 2 hours a day.
- Charge the battery when the Status light briefly turns red after the Keyboard turns on.
- When not in use, turn off the Keyboard to conserve battery power.
- The Keyboard enters sleep mode if powered on and not used. Press any key to wake.

Visit Product Central

There's more information and support online for your product. Take a moment to visit Product Central to learn more about your new Keyboard.

Browse online articles for setup help, usage tips, or information about additional features.

Connect with other users in our Community Forums to get advice, ask questions, and share solutions.

At Product Central, you'll find a wide selection of content:

- Tutorials
- Troubleshooting
- Support community
- Online documentation
- Warranty information
- Spare parts (when available)

Go to www.logitech.com/support/ultrathinkeyboardmini

Use your product

Product features



Home

Displays the iPad mini Home screen



Fn + 1 = Lock screen

Locks or unlocks the iPad mini screen



Fn + 2 = Siri

Siri lets you use your voice to send messages, schedule meetings, place phone calls, and more



Fn + 3 = Search

Note: Available only for iPad mini with iOS 6 or earlier.



Fn + 4 = Switch language

Switches the keyboard language



Fn + 5 = Virtual keyboard

Shows/hides the virtual keyboard



Fn + 6 = Slide show

Note: Available only for iPad mini with iOS 6 or earlier.



Fn + 7 = Previous track



Fn + 8 = Play/Pause



Fn + 9 = Next track



Fn + 0 = Mute



Fn + dash = Volume down



Fn + plus = Volume up



Fn + X = Cut



Fn + C = Copy



Fn + V = Paste



Fn + Left cursor = Select left

Selects text on the left, word by word



Fn + Right cursor = Select right

Selects text on the right, word by word

**Fn + Space bar =
Switch applications**

Note: Function keys To use, press and hold the Fn key, and then press a key listed above.

Status light indications


Light	Description
Blinking green	The battery is charging.
Solid green	The battery is fully charged (100%).
Red	Battery power is low (less than 10%). Recharge the battery.

Bluetooth light indications


Light	Description
Blinking	Fast: The keyboard cover is in discovery mode, ready for pairing. Slow: The keyboard cover is trying to reconnect to your iPad mini.
Solid	Bluetooth pairing or reconnection is successful.

Storing the iPad mini for travel

1. Lift the iPad mini from the Keyboard.
2. Rotate the iPad mini, with the screen side down, so the Home button is on the right.
3. Place the iPad mini on to the Keyboard.
A magnetic clip holds the iPad mini in position.

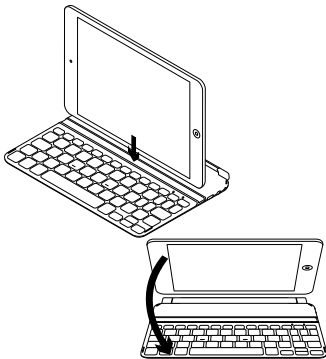

Connecting to a different iPad mini

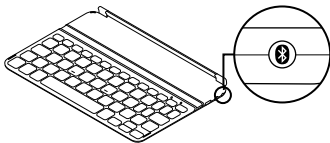

1. Make sure the Keyboard is turned on.
2. Check that your iPad mini's Bluetooth feature is on. Select Settings > Bluetooth > On.
3. Press the Bluetooth Connect Button. The Keyboard is discoverable for 3 min.
4. Select "Ultrathin Keyboard Mini" on the iPad mini's Devices menu.
5. If your iPad mini requests a PIN, enter the code using the Keyboard and not your iPad mini's virtual keyboard. After the Bluetooth connection is made, the Bluetooth light turns on, and then it turns off.
6. Place the new iPad mini on the Keyboard.

Troubleshooting

The Keyboard does not work

- Press any key to wake the Keyboard from sleep mode.
- Turn the Keyboard Off and then back On.
- Recharge the internal batteries. For more information, refer to "Charge the batteries."
- Re-establish the Bluetooth connection between the Keyboard and iPad mini.
- Verify that iPad mini's Bluetooth feature is turned on.
- Choose "Ultrathin Keyboard Mini" from the Devices menu on your iPad mini. The Bluetooth light turns on after the Bluetooth connection is made.


What do you think?

Please take a minute to tell us.


Thank you for purchasing our product.

www.logitech.com/ithink

Battery disposal at product end of life

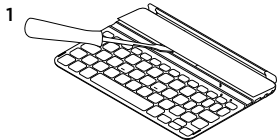


1. Pry off top cover of keyboard with screwdriver.
2. Detach battery from circuit board and remove battery.



3. Dispose of your product and its battery according to local laws.






了解您的产品

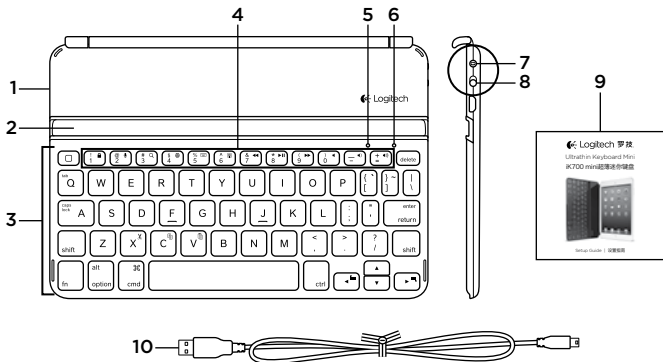

1. 保护盖
2. iPad mini 支架
3. 键盘
4. 功能键
5. 蓝牙® 指示灯

6. 状态指示灯
7. 蓝牙连接按钮
8. On/Off 开关
9. 文档
10. 微型 USB 充电连接线

设置您的产品



1. 开启键盘：

- 蓝牙搜索功能自动开启，将持续 15 分钟。蓝牙指示灯闪烁。
- 如果状态指示灯短暂变为红灯，请为电池充电。有关详细信息，请参见“为电池充电”。


2. 确保 iPad mini 的蓝牙功能已经开启。 依次选择：设置 > 蓝牙 > 开启。

3. 在 iPad mini 的设备菜单上选择“Ultrathin Keyboard Mini”（超薄迷你键盘）。

4. 如果 iPad Mini 要求 PIN 码，请使用键盘而非 iPad mini 的虚拟键盘输入 PIN 码。蓝牙连接成功后，蓝牙指示灯将亮起，然后熄灭。

5. 将 iPad mini 横向放置在键盘上。

为键盘电池充电

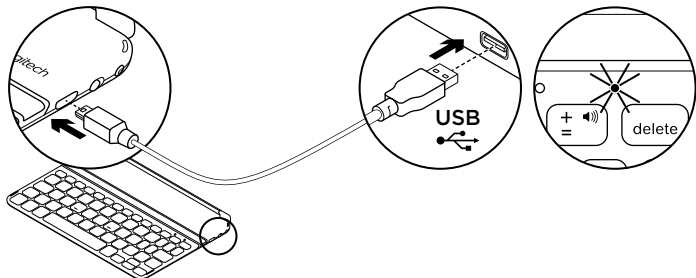

1. 将微型 USB 连接线的一端插入充电端口，将另一端插入电脑上的 USB 端口。
或者，您也可以使用 5V USB 充电器（如 iPad mini 随附的充电器）进行充电，前提是电源输出功率至少为 500mA。
电池充电过程中，状态指示灯将闪烁绿灯。
2. 为电池充电，直到状态指示灯变为稳定的绿灯为止。

电池信息：

- 如果键盘每天使用约两个小时，则满电量电池可使用约三个月时间。
- 如果开启键盘之后，状态指示灯短暂亮起红灯，请为电池充电。
- 不使用时，请关闭键盘以节省电池电量。
- 如果键盘处于开启状态而未被使用，则会进入休眠模式。按任意键即可唤醒。

访问“产品中心”

我们的网站提供有关于本产品的详细信息和支持服务。请抽时间访问“产品中心”，了解关于新键盘的更多信息。

浏览在线文章，查看设置帮助、使用技巧或关于更多功能的信息。

通过“社区论坛”与其他用户交流，获得建议，提出问题，分享解决方法。

“产品中心”提供了广泛的内容选择：

- 教程
- 疑难解答
- 支持社区
- 在线文档
- 保修信息
- 备用部件（若有供应）

访问 www.logitech.com/support/ultrathinkeyboardmini

使用您的产品

产品功能



Home

显示 iPad mini 主屏幕



Fn + 1 = 锁屏

锁定或解锁 iPad mini 屏幕



Fn + 2 = Siri

通过 Siri 您可以用声音发送信息、安排会议、拨打电话以及执行更多操作



Fn + 3 = 搜索

请注意： 仅适用于 iOS 6 或更早版本的 iPad mini。



Fn + 4 = 切换语言

切换键盘语言



Fn + 5 = 虚拟键盘

显示/隐藏虚拟键盘



Fn + 6 = 幻灯片演示

请注意： 仅适用于 iOS 6 或更早版本的 iPad mini。



Fn + 7 = 上一曲目



Fn + 8 = 播放/暂停



Fn + 9 = 下一曲目



Fn + 0 = 静音



Fn + 减号 = 调低音量



Fn + 加号 = 调高音量



Fn + X = 剪切



Fn + C = 复制



Fn + V = 粘贴



Fn + 左光标 = 选择左侧内容
逐字选择左侧文本



Fn + 右光标 = 选择右侧内容
逐字选择右侧文本

Fn + 空格键 = 切换应用程序

注意： 功能键如要使用，请按住 Fn 键，按后按以上所列按键。

状态指示灯


指示灯	说明
闪烁绿灯	电池正在充电。
稳定绿灯	电池已充满 (100%)。
红灯	电量不足 (<10%)。为电池充电。

蓝牙指示灯状态


指示灯	说明
闪烁	快速： 键盘盖处于可被搜索状态，已准备好可以进行配对。 缓慢： 键盘盖正在尝试重新连接 iPad mini。
常亮	蓝牙配对或重新连接成功。

旅行时收纳 iPad mini

1. 从键盘上取下 iPad mini。
2. 将 iPad mini 旋转至屏幕朝下，使 Home 键位于右侧。
3. 将 iPad mini 放置于键盘上。磁力夹将把 iPad mini 固定到位。

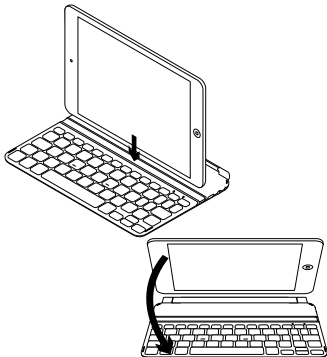

连接另一个 iPad mini



1. 确保键盘处于开启状态。
2. 检查并确保 iPad mini 的蓝牙功能已开启。
依次选择：设置 > 蓝牙 > 开启。
3. 按下蓝牙连接按钮。键盘在三分钟内将处于可被搜索状态。
4. 在 iPad mini 的设备菜单上选择“Ultrathin Keyboard Mini”（超薄迷你键盘）。
5. 如果 iPad Mini 要求 PIN 码，请使用键盘而非 iPad mini 的虚拟键盘输入 PIN 码。
蓝牙连接成功后，蓝牙指示灯将亮起，然后熄灭。
6. 将新的 iPad mini 放置于键盘上。

疑难解答

键盘不工作

- 按任意键即可将键盘从休眠模式中唤醒。
- 将键盘关闭，然后再将其重新开启。
- 为内置电池充电。有关详细信息，请参见“为电池充电”。
- 在键盘与 iPad mini 之间重新建立蓝牙连接。
- 确保 iPad mini 的蓝牙功能已开启。
- 在 iPad mini 的设备菜单上选择“Ultrathin Keyboard Mini”（超薄迷你键盘）。蓝牙连接成功后，蓝牙指示灯将亮起。


您对本产品有何感想？

欢迎拨冗告知我们。


感谢您购买罗技产品。

www.logitech.com/ithink

电池废弃处置



1. 用螺丝刀撬开键盘的顶盖。
2. 从电路板上分离电池，取出电池。



3. 根据当地法律对产品和电池进行弃置。

Table of Toxic and Hazardous Substances/Elements and their Content

产品中有毒有害物质或元素的名称及含量
根据中国<<电子信息产品污染控制管理办法>>

Keyboard 键盘						
有毒有害物质或元素						
部件名称	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
电缆 Cable	X	○	○	○	○	○
电路板组件 PWAs	X	○	○	○	○	○
塑料部件 Plastic parts	○	○	○	○	○	○
薄膜 Membrane	○	○	○	○	○	○
金属部件 Metal parts	X	○	○	○	○	○
橡胶圆盖 Rubber dome	○	○	○	○	○	○
<p>○ = 表示该有毒有害物质在该部件所有均质材料中的含量均在 SJ/T11363-2006 标准规定的限量要求以下。</p> <p>X = 表示该有毒有害物质至少在该部件的某一均质的含量超出 SJ/T11363-2006 标准规定的限量要求。</p> <p>表中标有“X”的所有部件都符合欧盟 RoHS 法规</p> <p>“欧洲议会和欧盟理事会 2003 年 1 月 27 日关于电子电器设备中限制使用某些有害物质的 2002/95/EC 号指令”</p> <p>注：环保使用期限的参考标取决于产品正常工作的温度和湿度等条件</p>						



www.logitech.com

© 2013 Logitech. All rights reserved. Logitech, the Logitech logo, and other Logitech marks are owned by Logitech and may be registered. Apple and iPad mini are trademarks of Apple Inc., registered in the U.S. and other countries. Bluetooth is a registered trademark of Bluetooth SIG, Inc. All other trademarks are the property of their respective owners. Logitech assumes no responsibility for any errors that may appear in this manual. Information contained herein is subject to change without notice.

版权所有 ©2013 年罗技。罗技、罗技标志、Logitech 和其他罗技商标均归罗技所有，并或已注册。Apple 和 iPad mini 是 Apple Inc. 在美国和其他国家注册的商标。蓝牙是 Bluetooth SIG, Inc. 的注册商标。所有其它商标均是其各自所有者的财产。罗技对于本手册中可能出现的任何错误不承担任何责任。本手册中包含的信息如有更改，恕不事先通知。

620-004872.007