


# ZONE 300

Setup Guide  
设置指南

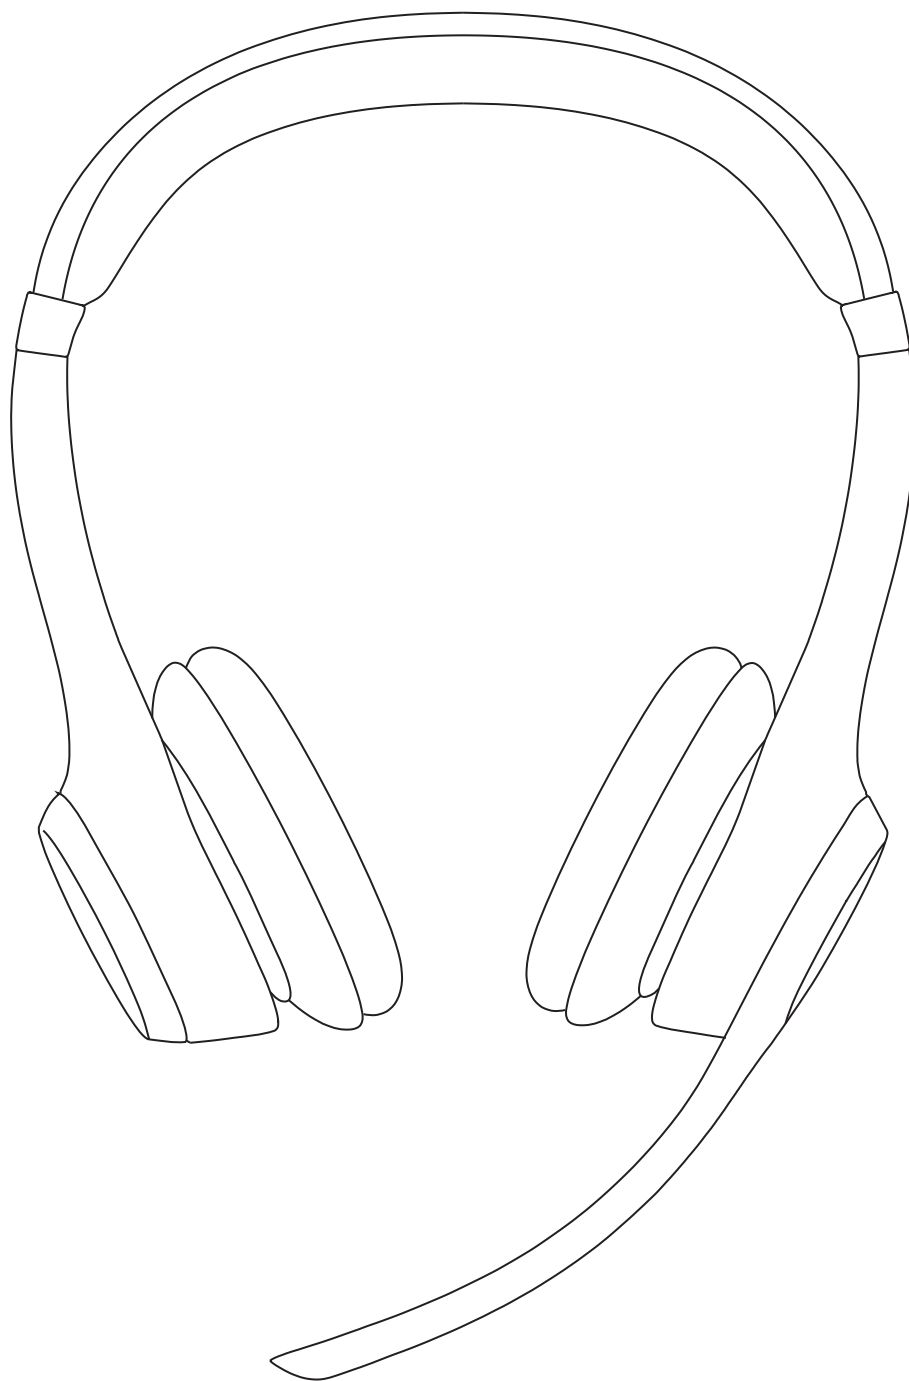


logitech 罗技®

**CONTENTS**


|                   |   |                |    |
|-------------------|---|----------------|----|
| English . . . . . | 3 | 简体中文 . . . . . | 11 |
|-------------------|---|----------------|----|

## KNOW YOUR PRODUCT

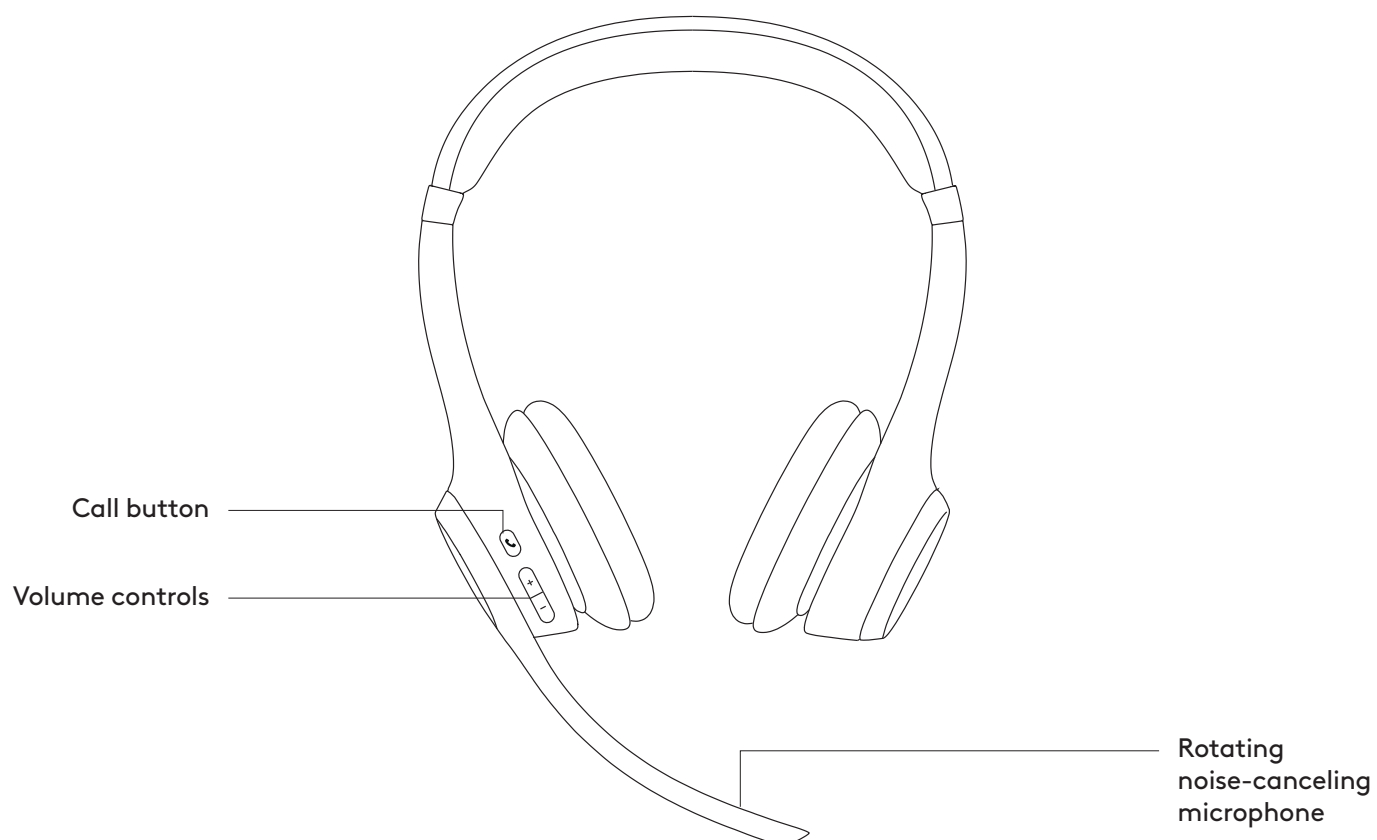


## WHAT'S IN THE BOX

1. Zone 300
2. USB-C charging cable
3. User documentation




## POWER ON/OFF

1. Press the power button once to power on the headset.
2. Once powered on, the LED light will turn white.

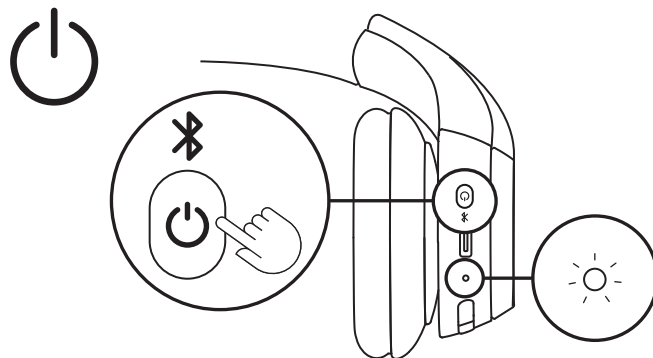


3. There will be a voice prompt that tells you the battery status<sup>1</sup>.

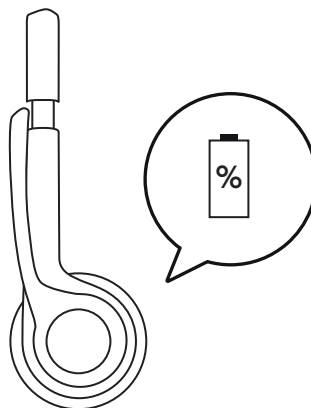

## CONNECTING YOUR HEADSET

1. Long press the power button on earcup until LED indicator starts blinking to initiate *Bluetooth*® pairing.

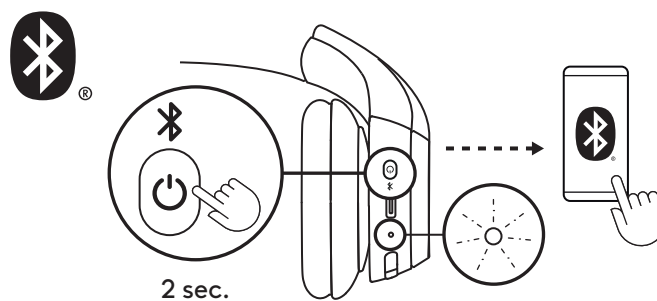

2. In your computer or mobile device's *Bluetooth®* settings, select "Zone 300" in discoverable devices.


If you are using *Windows 10* or later, a notification will pop up when you place the headset close to your computer. Click "Connect".

3. Repeat steps 1 and 2 if you want to pair with another device. You can pair with a maximum of 8 devices and connect to 2 devices simultaneously.




## ADJUSTING FIT

1. It may be easier to adjust the headsets on your head. Slide the earcups up and down the headband until they sit comfortably on your ears.

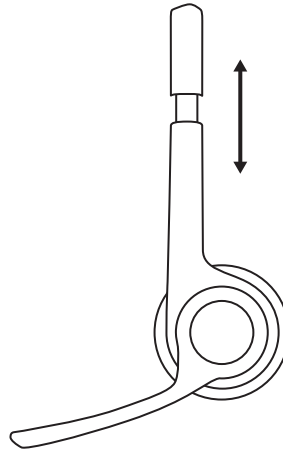


2. Move the microphone boom up or down until it is leveled with your mouth for better voice capture.

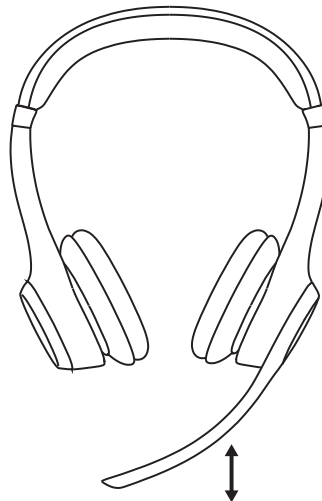


## MUTING

1. Flip up or down the mic boom to mute or unmute.

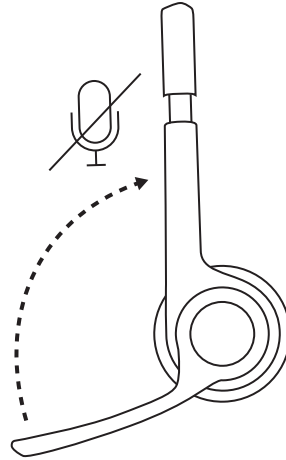


2. You will hear voice prompts that indicate whether the microphone is muted or unmuted<sup>1</sup>.

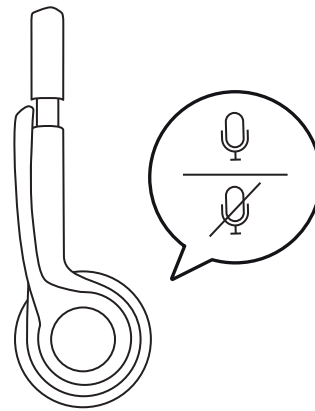


## CHARGING

The LED light on the headset will become red when the battery is lower than 10%.

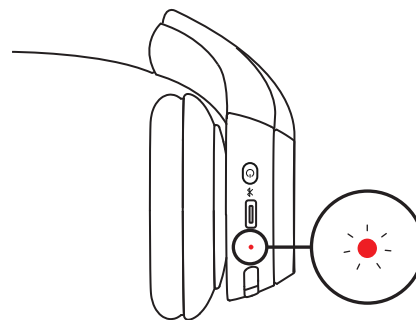

1. Plug one end of the cable to the *USB-C* port on the bottom of the earcup and the other end into the *USB-C* charging port on your computer or a power adapter.
2. The LED light will start breathing when charging.
3. The LED light will turn solid white when fully charged.  
A 5-minute charge will give you up to 1 hour of talk time<sup>3</sup>, and a full charge takes around 2 hours.
4. The headset can be used with *Bluetooth*® paired while charging.

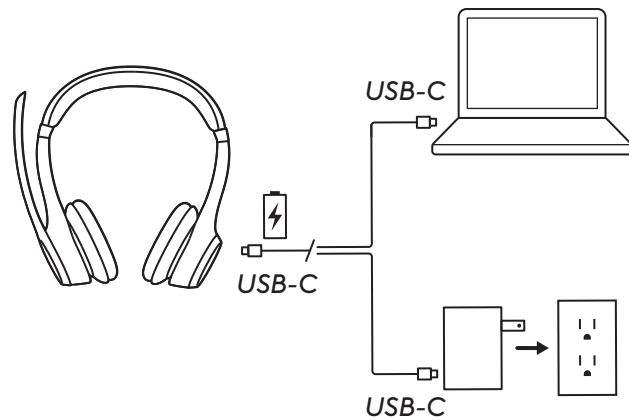

## CUSTOMIZING WITH LOGI TUNE

Take control of your music and meeting experience with Logi Tune. Adjust sidetone, mic level, and EQ for your preferred audio experience using the Logi Tune desktop or mobile app for Logitech headsets.

It is also recommended to boost your headset performance with periodic software and firmware updates.



## ADJUSTING SIDETONE

Sidetone lets you hear your own voice during conversations so you are aware of how loud you are talking. In Logi Tune, select the sidetone feature, and adjust the dial accordingly.


- A higher number means you hear more external sound.
- A lower number means you hear less external sound.

## AUTO SLEEP TIMER


By default, your headset will automatically power off when not in use for 30 minutes to conserve battery. Adjust the sleep timer in Logi Tune. To wake up your headset, try press the power switch again.

## RESET YOUR HEADSET


1. Power the headset on.

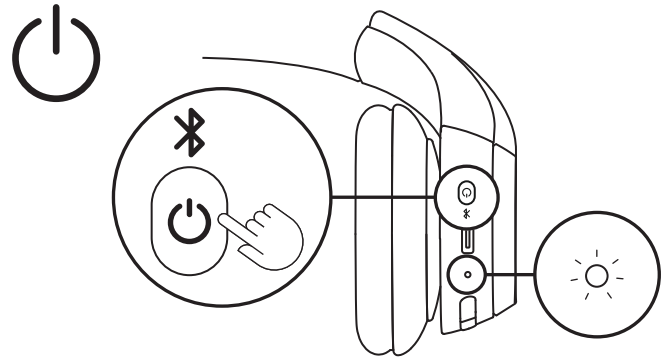


2. Press and hold the call button and volume "-" button for 5 seconds.

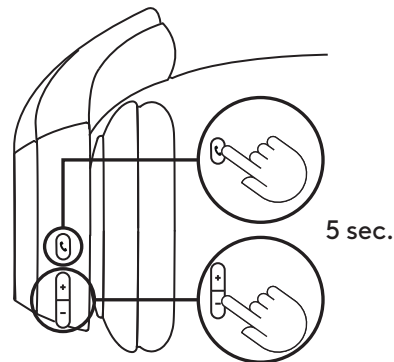

3. The LED light will quickly blink from red to white for 3 times and then turns off when your headset is successfully reset.

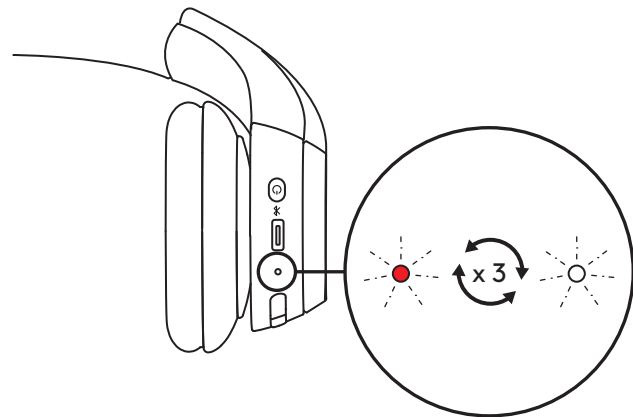

4. The headset will turn off after reset.

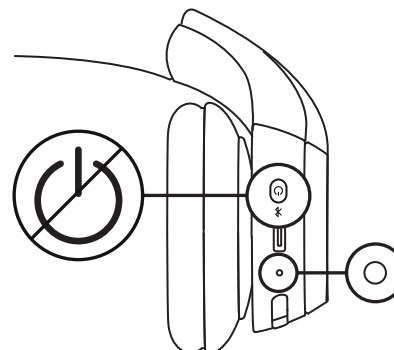

## BUTTON CONTROLS

|               | Usage              | Button       | Action         |
|---------------|--------------------|--------------|----------------|
| Call controls | Answer / End call  | Call button  | Short press    |
|               | Reject call        |              | 1.5 sec. press |
|               | Resume call        |              | Short press    |
| Volume        | Volume up          | "+"          | Short press    |
|               | Volume down        | "_"          | Short press    |
| Connectivity  | Bluetooth® pairing | Power button | 2 sec. press   |

## LED LIGHT INDICATORS

| Category      | Status                | LED Light                                                   |
|---------------|-----------------------|-------------------------------------------------------------|
| Power         | Power on              | Solid                                                       |
|               | Battery charging      | Breathing                                                   |
|               | Battery fully charged | Solid                                                       |
|               | Low battery (<10%)    | Red                                                         |
| Connectivity  | Bluetooth® pairing    | Blinking                                                    |
|               | Bluetooth® connected  | Solid                                                       |
|               | Connection lost       | Slow blinking                                               |
| Factory reset |                       | Fast blink from red to white for three times then turns off |

**Note:** User-triggered behaviors, such as *Bluetooth®* pairing, will be prioritized; The light indicator will then revert back to its previous status once the behavior is completed.

## DIMENSIONS

### Headset:

Height: 172.84 mm (6.8 in)

Width: 166.71 mm (6.6 in)

Depth: 66 mm (2.6 in)

Weight: 122 g (4.3 oz)

### Earpad:

Height: 66 mm (2.6 in)

Width: 66 mm (2.6 in)

Depth: 16 mm (0.63 in)

## COMPATIBILITY

Works with *Windows*, *macOS*, *ChromeOS²*, *Linux²*, *iOS*, *iPadOS*, or *Android* devices via *Bluetooth®*.

Compatible with common calling applications.

## TECHNICAL SPECIFICATIONS

Microphone Type: Dual beamforming mics with noise-canceling algorithms

Frequency response (Speaker): 50-20 kHz (music mode), 100-7 kHz (talk mode)

Frequency response (Microphone): 100-7 kHz

Listening time: Up to 16 hrs<sup>3</sup>

Talk time: Up to 20 hrs<sup>3</sup>

Bluetooth® version: 5.3

Wireless range: Up to 30 m / 98 ft<sup>4</sup>

Charging cable length: 1 m

### FOOTNOTE

<sup>1</sup>The headset currently supports voice prompts in the following languages: English, French, German, Italian, Spanish, and Portuguese. You can choose your preferred language in the Logi Tune app.


<sup>2</sup>Device basic functions will be supported for operating systems that do not support Logi Tune. Check Logi Tune compatibility on [logi.com/tune](https://logi.com/tune).

<sup>3</sup>Battery life may vary based on user and computing conditions.

<sup>4</sup>Open field line of sight. Wireless range may vary depending on the operating environment and computer setup.


[www.logitech.com/support/zone300](https://www.logitech.com/support/zone300)

了解您的产品

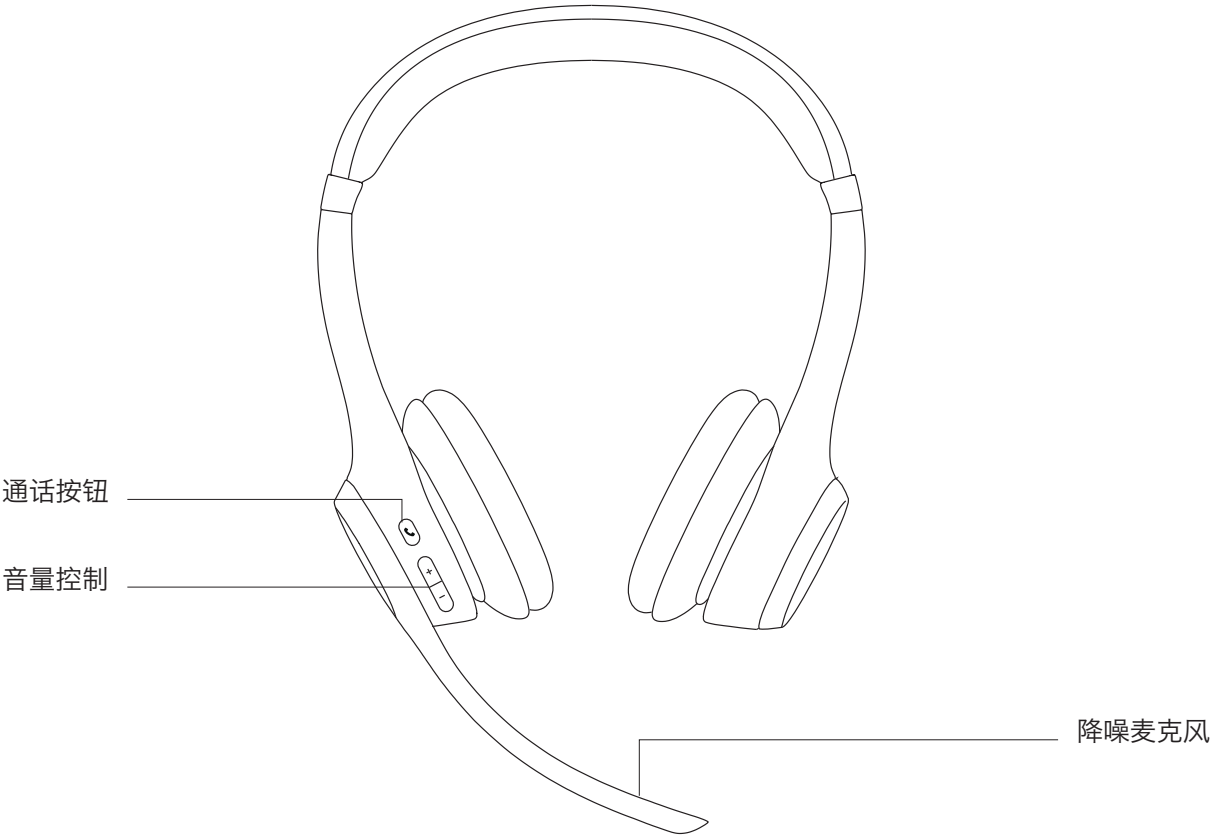


## 包装内容

1. Zone 300 耳机麦克风
2. USB-C 充电线
3. 用户文档




## 电源开关

1. 按下电源按钮启动耳机麦克风。
2. 接通电源后，LED 会变为白色。

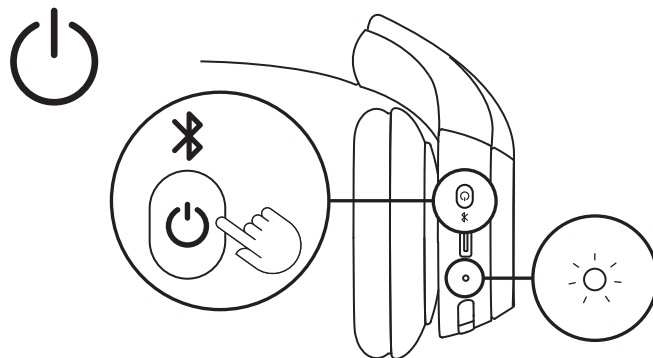


3. 将会有语音提示告知您电池状态。

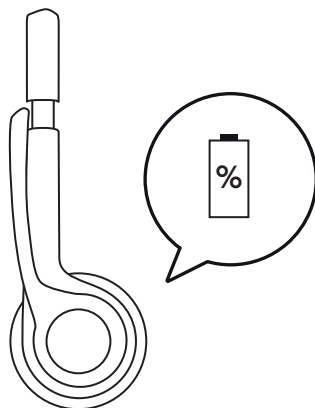


## 连接耳机

1. 长按耳罩上的电源按钮，直至 LED 指示灯开始闪烁，启动蓝牙™配对。

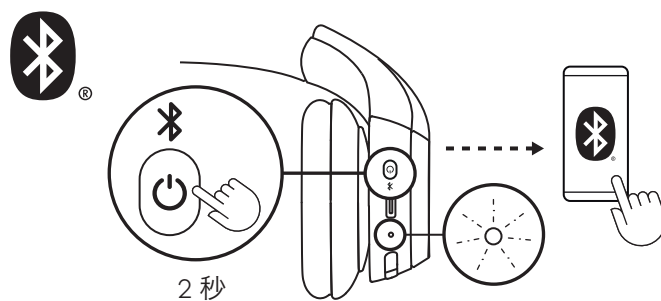

2. 在电脑或移动设备的蓝牙™设置中，在可发现设备中选择“Zone 300”。


如果您使用的是 Windows 10 或更高版本，将耳机麦克风靠近电脑时会弹出通知。点击“连接”。




3. 如果要与其他设备配对，请重复步骤 1 和 2。最多可配对 8 台设备，并同时连接 2 台设备。

### 调节佩戴贴合度

1. 带上耳机麦克风后再进行调节会更加方便。在头带处上下滑动耳罩，直至舒适贴合耳部。

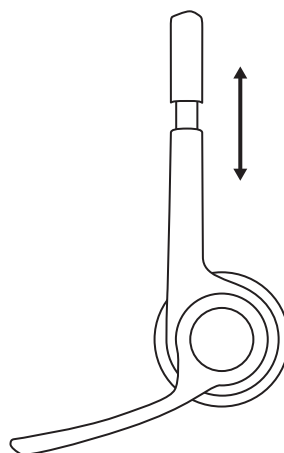


2. 可上下移动麦克风杆，直至与嘴部齐平，以便更好地捕捉声音。

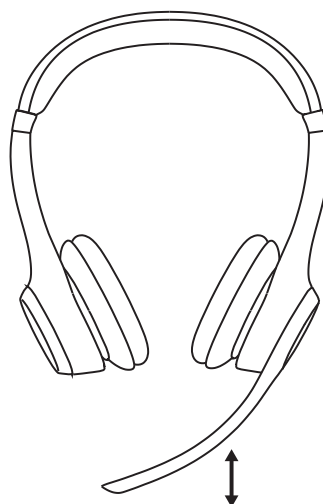


## 静音

1. 向上或向下翻转麦克风杆可以静音或取消静音。

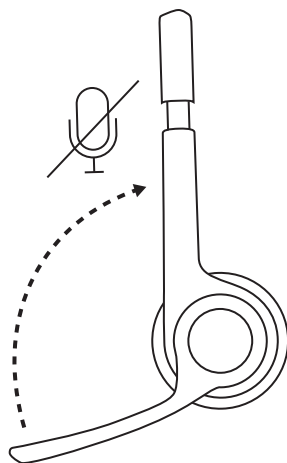


2. 您将听到语音提示<sup>1</sup>，指示麦克风是否静音。

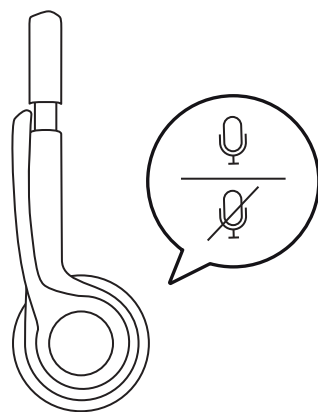


## 充电

电量低于 10% 时，耳机麦克风的 LED 将变为红色。

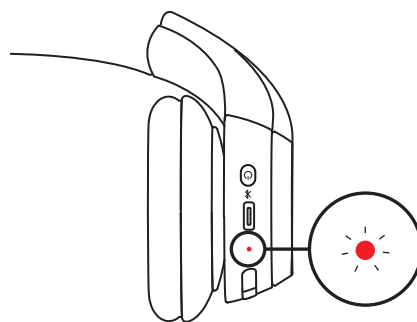

1. 将数据线的一端插入耳罩底部的 USB-C 端口，另一端插入电脑或电源适配器的 USB-C 充电端口。
2. 充电时，LED 将变为呼吸灯。
3. 充电完成后，LED 将常亮白色。  
充电 5 分钟即可提供长达 1 小时通话时间<sup>3</sup>，完全充电大约需要 2 小时。  
**注：**  
电池使用时长的测量为从完全充电到自动关闭，通话时间和聆听时间均采用 50% 的音量。
4. 充电时，耳机麦克风可通过已配对的蓝牙™设备使用。

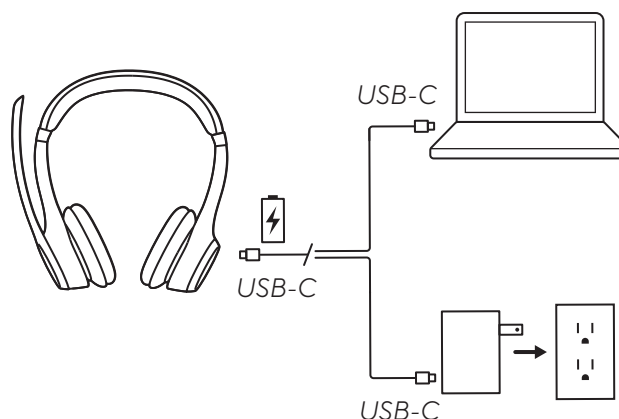

## 使用 LOGI TUNE 进行自定义

使用 Logi Tune 掌控您的音乐和会议体验。使用适用于罗技耳机麦克风的 Logi Tune 桌面版或移动应用程序调节侧音、麦克风音量和均衡器，获得您偏好的音频体验。

我们还建议您通过定期的软件和固件更新来改善耳机麦克风的性能表现。



## 调节侧音

侧音让您可以在对话中听到自己的声音，以了解自己的说话音量。在 Logi Tune 中选择侧音功能，并相应调节拨盘。


- 数字越大表示您听到的外部声音越多。
- 数字越小表示您听到的外部声音越少。

## 自动睡眠定时器


默认情况下，耳机麦克风会在闲置 1 小时后自动关机以节省电量。在 Logi Tune 中调节睡眠定时器。要唤醒耳机，再次按下电源开关。

## 重置耳机麦克风


1. 打开耳机麦克风的电源。

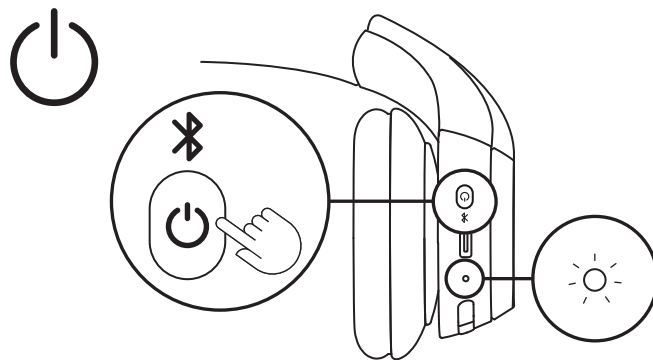


2. 按住通话按钮和音量“-”按钮 5 秒钟。

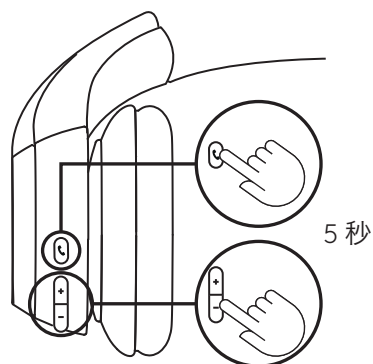

3. LED 会从红色到白色快速闪烁 3 次，然后在耳机麦克风成功重置后熄灭。

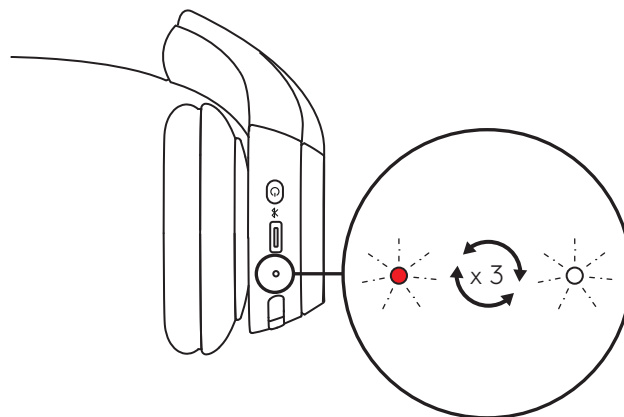

4. 重置后。耳机麦克风将关机。

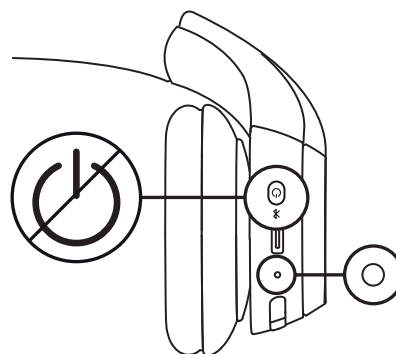

按钮控制

|      | 使用      | 按钮   | 操作      |
|------|---------|------|---------|
| 通话控制 | 接听/结束通话 | 通话按钮 | 短按      |
|      | 拒绝通话    |      | 按 1.5 秒 |
|      | 恢复通话    |      | 短按      |
| 音量   | 音量上升    | "+"  | 短按      |
|      | 音量下降    | "-"  | 短按      |
| 连接   | 蓝牙™ 配对  | 电源按钮 | 按 2 秒   |

LED 指示灯

| 类别     | 状态          | LED 灯           |
|--------|-------------|-----------------|
| 电源     | 开机          | 常亮              |
|        | 正在充电        | 呼吸灯             |
|        | 电池完全充电      | 常亮              |
|        | 低电量 (< 10%) | 红色              |
| 连接     | 蓝牙™ 配对      | 闪烁              |
|        | 蓝牙™ 已连接     | 常亮              |
|        | 连接断开        | 缓慢闪烁            |
| 恢复出厂设置 |             | 从红到白快速闪烁 3 次后熄灭 |

注意：蓝牙™ 配对等用户触发的行为将被优先处理，LED 指示灯将在行为完成后恢复到此前的状态。

尺寸

耳机麦克风：  
高：约 172.84 毫米  
宽：约 166.71 毫米  
深：约 66 毫米  
重量：约 122 克

耳垫：  
高：约 66 毫米  
宽：约 66 毫米  
深：约 16 毫米

兼容性

通过蓝牙™ 支持 Windows、macOS、ChromeOS<sup>2</sup>、Linux<sup>2</sup>、iOS、iPadOS 或 Android 设备。  
兼容常用通话应用程序。

## 技术规格

麦克风类型：双波束成形麦克风搭载降噪算法

频率响应（扬声器）：50~20 kHz（音乐模式），  
100~7 kHz（通话模式）

耳机麦克风频率响应：100-7 kHz

播放时间：最长 16 小时<sup>3</sup>

通话时间：最长 20 小时<sup>3</sup>

蓝牙™版本：5.3

无线接收范围：最远 30 米<sup>4</sup>

充电线长度：约 1 米

## 附注

<sup>1</sup> 耳机麦克风目前支持以下语言的语音提示：英语、法语、德语、意大利语、西班牙语和葡萄牙语。您可以在 Logi Tune 应用程序中选择首选语言。

<sup>2</sup> 不支持 Logi Tune 的操作系统亦可支持设备的基本功能。查看 Logi Tune 兼容性请访问 [logi.com/tune](https://logi.com/tune)。

<sup>3</sup> 电池使用时长的测量为从完全充电到自动关闭，通话时间和聆听时间均采用 50% 的音量。

<sup>4</sup> 无遮挡环境。无线接收范围依运行环境和电脑设置而异。

[www.logitech.com/support/zone300](https://www.logitech.com/support/zone300)