



DATASHEET

Rally AI Camera


Rally AI Camera is an intelligent camera with brilliant optics and a discreet, low-profile design. It integrates seamlessly with conference audio systems. With its one-inch imaging sensor and AI-based RightSight 2 technology from Logitech, the camera provides intelligent focusing and framing to ensure everyone in the room is seen clearly. Rally AI Camera is meant to work harmoniously with your room design, with options to mount the camera to the wall or within it for a truly subtle presence.

- **Brilliant optics:** Ensure every participant and every interaction is captured with clarity, thanks to the Logitech-designed lens and one-inch imaging sensor.
- **Intelligent video with AI-based RightSight 2:** Automatically frame groups, individuals, and speakers for more productive, person-to-person interactions.
- **Discreet presence:** Rally AI Camera is made for rooms where audio and video are meant to blend into the background.
- **Choice and flexibility:** Set up quickly with USB or a CAT cable¹ with an audio system of your choice.
- **Single- and multi-camera deployments:** Use on its own — or in combination with other Logitech cameras to capture meeting participants from multiple angles.
- **Centralized insights and management:** Manage Rally AI Camera in Logitech Sync to easily configure, monitor, and update the device.



Brilliant optics

Deliver professional video in every meeting thanks to the Logitech-designed lens and advanced optics and imaging. The camera includes both a low-distortion, 115° field of view and a one-inch imaging sensor that captures brilliant detail. The result is high-fidelity video from wide room coverage to close-up framing, ensuring that every participant and every interaction is captured with clarity.

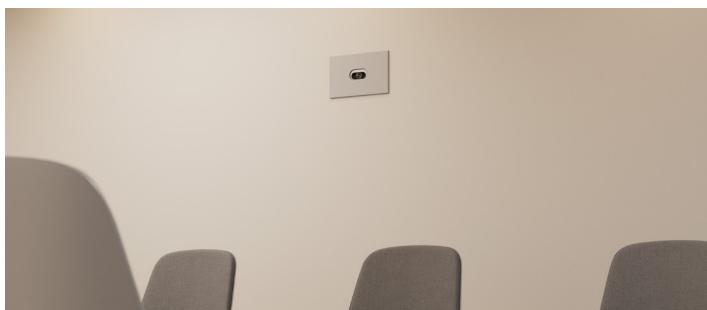

Discreet presence

Rally AI Camera delivers professional-quality video in our smallest form factor yet. This conference camera is made for rooms where audio and video blend into the background, almost invisible. Add the optional in-wall mount for an even more subtle presence in your rooms.



Made for both single- and multi-camera deployments

Rally AI Camera is made to use alone or in multi-camera setups where you want to capture participants from multiple angles. And you can enable multi-camera experiences² with Zoom and Microsoft Teams for a more complete view of the room.



Intelligent video with RightSight 2

Add intelligent video to meeting rooms with AI-based RightSight 2 technology and ensure that everyone is seen clearly. Rally AI Camera automatically frames groups and individuals for more productive, person-to-person interactions.



Choice and flexibility

Set up video quickly with USB or a single CAT cable (with the optional Rally AI Camera Extension Kit). Choose the conference audio system you prefer, whether from Logitech or one of our pro audio partners². Complete the setup with a portfolio of mounting options — wall, ceiling, display, etc.



Centralized insights and management

Manage Rally AI Camera directly in Logitech Sync to easily configure, monitor, and update the camera alongside your other meeting room devices. The camera also provides Sync with device status and insights about room usage and occupancy. This data helps inform workplace analytics and automation so organizations can make strategic decisions about office space.

Dimensions	Height	91 mm (3.6 in)
	Width	224 mm (8.8 in)
	Depth	101 mm (4 in) [*] * Using the optional in-wall mount, Rally AI Camera can be mounted flush with the wall.
Camera Specs	Camera Resolution	4K, 1440p, 1080p, 900p, 720p, and SD at 30fps
	Zoom	4X HD digital zoom
	Sensor	20mp, 1 inch
	dFOV	Diagonal: 115.7°
	hFOV	Horizontal: 103.3°
	vFOV	Vertical: 60.7°
	Frequency response	90 Hz-16 kHz
Microphones	Sensitivity	>-36 dBFS +/-1 dB @ 1 Pa
	Microphone data rate output	48 KHz
	Beamforming elements	8 omnidirectional digital MEMS
	Audio processing	Beamforming + direction of arrival (used for camera framing)

Interfaces	USB	3.2 Gen 1
	Wi-Fi	802.11 a/b/g/n/ac/ax
	Bluetooth Low Energy (BLE)	5.3
	Power supply	POE+
Power & Cables	Operating voltage/power	100 - 240 V
	Power supply dimensions	60 mm (2.4 in) x 35 mm (1.4 in) x 90 mm (3.5 in)
	AC cable	1 m (3.3 ft)
	USB C to USB C	2 m (6.5 ft) USB 3.2 Gen 1
	CAT cable	3 m (9.8 ft) CAT 6A
	Operating temperature	0 to 35 °C
	Storage temperature	-40 to 70 °C
Environmental	Humidity	10 to 95%
	BTU/hr	34 idle, 68 in the meeting
	Full disk encryption	AES-128
	Data encryption	Symmetric Keys, PKI
Security	Device identity	Protected by device attestation
	Device access	Authenticated using API
	Key protection	Arm TrustZone, Secure Storage

¹ Connecting Rally AI Camera with a CAT cable is available with the optional Rally AI Camera Extension Kit.

² For the latest information on certifications and compatibility, visit logitech.com/support/vc-certifications

Part Numbers		
Region	Graphite	Off-White
Worldwide	960-001808	960-001809
China	960-001810	960-001811
Japan	960-001813	960-001812
India	960-001824	-



logitech.com/RallyAIcamera

Contact your reseller
Or contact us at
www.logitech.com/business

Logitech Americas
3930 North First Street,
San Jose, CA 95134

Logitech Europe S.A.
EPFL - Quartier de l'Innovation
Daniel Borel Innovation Center
CH - 1015 Lausanne

Logitech Asia Pacific Ltd.
Tel : 852-2821-5900
Fax : 852-2520-2230

© 2026 Logitech. Logitech, Logi, and all other Logitech trademarks and logos are trademarks or registered trademarks of Logitech Europe S.A. or its affiliates in the U.S. and/or other countries. All other third-party trademarks are the properties of their respective owners. Logitech assumes no responsibility for any errors that may appear in this publication. Product, pricing, and feature information contained herein is subject to change without notice.

Published January 2026