



DATASHEET

Rally Board 65 and Cart

All-in-one video conferencing device with 65" touchscreen, intelligent audio, and high-res video — plus mobile cart for flexible setup anywhere.

Exceptional audio and video clarity

Deliver crystal-clear meetings in any space with a custom-designed camera featuring a wide 110° field of view and a one-inch image sensor, paired with powerful speakers and AI-optimized microphones that ensure everyone is heard — minus the background noise. All of this is seamlessly integrated into a 65-inch touchscreen display paired with a mobile cart — allowing you to bring video calls, content collaboration, whiteboarding, and more to any space.

logitech®



Bring video meetings anywhere with flexible, mobile design

Easily move Rally Board 65 from place to place with the purpose-built Rally Board 65 Cart, designed to video-enable both traditional meeting rooms and open spaces. Locking wheels and integrated cable management support quick, clean deployment, while the adjustable flip mechanism lets you position Rally Board 65 with the camera above or below the screen for a flexible, all-in-one setup anywhere you need it.



Exceptionally sharp video

Capture high-quality video no matter the space, thanks to the one-inch image sensor and custom-designed lens that enable a wide 115° field of view.




Designed with privacy in mind

Feel secure using built-in privacy control — an automatic shutter opens and closes with each meeting, while a status light clearly indicates when the camera and mic are active.



Clear and crisp audio

Enjoy crystal-clear conversations with Rally Board 65, designed to deliver exceptional audio quality in any space. A powerful speaker system, optimized for open spaces, ensures that everyone can hear, while a far-reaching microphone array with AI-enabled algorithms filters unwanted noises and ensures everyone can be heard.

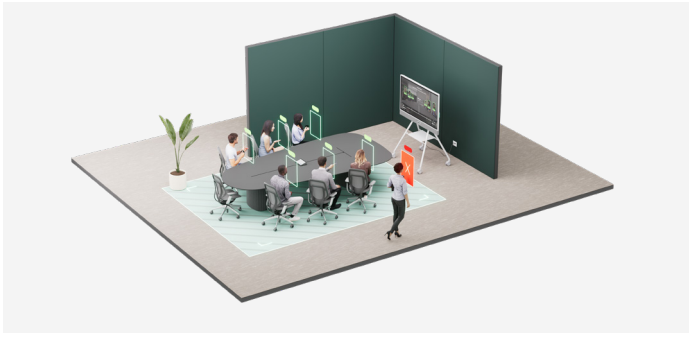

Everyone is seen and heard clearly

Make sure everyone is seen and heard in meeting rooms and open spaces. AI-driven video and audio technologies — RightSight 2 and RightSound 2 — ensure optimal framing and clear sound for every participant. Depth Blur* helps eliminate distractions by defining an area of focus in open spaces and blurring areas beyond it.


*Depth Blur will become available with a future software update.



Ready in no time


Set up Rally Board 65 and Cart right out of the box in just a few steps and minimize the need for onsite IT support. Plus, with Remote UI Access*, you can configure devices quickly from any location, ensuring seamless setup and control wherever you are.

*Remote UI Access is available for network-connected deployments.

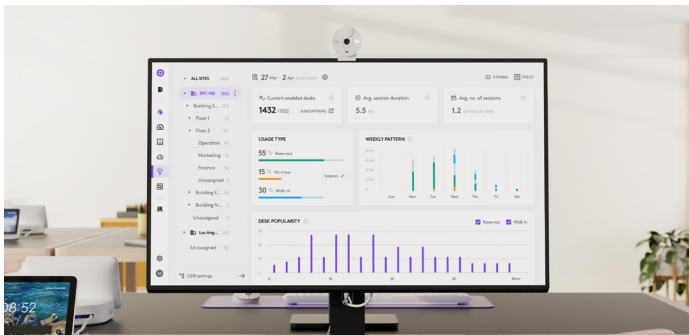

Remotely access and manage

Effortlessly manage Rally Board 65 and other Logitech devices through Sync, Logitech's powerful remote management software. Or manage it with platform management portals like Teams Admin Center, Zoom Device Management, and more.

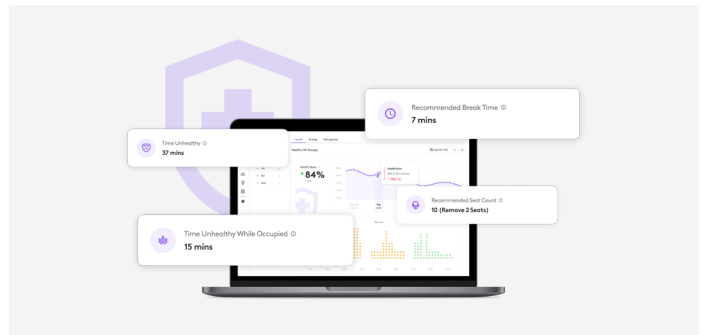

Make smarter decisions with insights

Using Sync, see occupancy and environmental data over time to make informed decisions about how to evolve and change your spaces. Get recommendations on how to make meeting rooms and open spaces into more productive work environments.



Next Life Plastics

The plastic parts in Rally Board 65 include a minimum of 27%* post-consumer recycled plastic to give a second life to end-of-life plastic from old consumer electronics and help reduce our carbon footprint.

* Graphite: minimum 41%, Off-white: minimum 27%.

System Requirements	100-240v Internet connection: Wired or wireless Room solution software license (not included)
Dimensions	Rally Board 65 standalone: Width: 150 cm (59 in) Height: 98.9 cm (39 in) Depth: 7.6 cm (3.0 in) Weight: 46 kg (101 lb) VESA Standard: MIS F 400 x 400 mm and 400 x 200 mm Rally Board 65 with included table stand Width: 150 cm (59 in) Height: 105.1 cm (41.4 in) Depth: 39.5 cm (15.6 in) Weight: 50 kg (110 lb) Cart assembled with Rally Board 65 in camera-high orientation Height: 196.3 cm (77.28 in) Width: 150 cm (59.05 in) Depth: 81.2 cm (31.97 in) ¹ Center-of-lens height: 187.7 cm (73.89 in) Cart assembled with Rally Board 65 in camera-low orientation Height: 196.3 cm (77.28 in) Width: 150 cm (59.05 in) Depth: 81.2 cm (31.97 in) ² Center-of-lens height: 100.1 cm (39.39 in) Cart assembled with Rally Board 65 in mid-flip orientation Height: 196.3 cm (77.28 in) Width: 150 cm (59.05 in) Depth: 98.9 cm (38.94 in) Cart weight: 49 kg (108 lb) ³ Assembled weight: 95 kg (210 lb) Caster type: Twin wheel 10.2 cm (4 in) locking casters
Display	65-inch LCD screen IR-based touch with 20 points of touch UHD 4K (3840 x 2160) screen resolution 16:9 aspect ratio Anti-glare coating Anti-fingerprint coating Contrast ratio: 5000:1 Typical Brightness: 400 nits Typical
General	Built-in components: Front microphone array, digital PTZ camera, dual full-range ported speakers, dual tweeters, ultrasonic emitter, cable management and retention system, integrated motorized privacy shutter, depth mapping camera, radar motion sensing, and environmental sensors Support for 2nd display, up to UHD 4K60 (3840 x 2160) Automatic motorized privacy shutter HDMI ingest at up to 4K60 (3840 x 2160) resolution Network protocol support: IPv4, IPv6 Proxy support: IP-based proxy, FQDN-based proxy, proxy using PAC file
Camera	Main camera Imaging sensor: 1-inch, 20.3mp Resolution: 4K, 1440p, 1080p, 900p, 720p, and SD at 30fps Automatic motorized tilt based on device orientation Zoom: 4X HD digital zoom Distortion-corrected field of view: <ul style="list-style-type: none">• Diagonal: 115.7°• Horizontal: 103.3°• Vertical: 60.7° Depth mapping camera Diagonal field of view: 145° Horizontal field of view: 121°
Speakers	Dual full-range ported speakers Driver: 2 x 70 mm Sensitivity: 89 dB SPL at 1W/0.5 m Rated Power: 8 W THD at 1 W, 1 kHz <2% Dual high-frequency tweeters Driver 2 x 31 mm Sensitivity: 93 dB SPL at 1W/0.5 m Rated Power: 8 W THD at 1 W, 4 kHz < 2%

Microphones	Front microphone array Frequency response: 90 Hz - 16 kHz Sensitivity: -36 dB FS +/-1 dB @ 1 Pa Microphone data rate output: 48 kHz Pickup range: Up to 7 m (23 ft) RightSound 2 AI Speech Enhancement removes transient and stationary noise Beamforming with AI Beam Selection AI Speech Detection AI Direction of Speech Acoustic Echo Cancellation and Residual Echo Suppression
Sensors	Temperature Humidity tVOC (Total volatile organic compounds) Carbon dioxide PM2.5 and PM10 PM10 Radar Ambient light
Platform Compatibility	For the latest information on certification and compatibility, see www.logitech.com/support/vc-certifications
Interfaces	1 x HDMI Out: up to 4K60 1 x HDMI In: up to 4K60 USB-A: 3 x USB 3.1 USB-C: 1 x Type C USB 3.1 with DP Alt Mode Line-Out: 3.5 mm line-level audio output Network: 10/100/1G Ethernet Wi-Fi: 802.11a/b/g/n/ac Bluetooth: Bluetooth® Low Energy EXT: RJ45 reserved for future use
Power and Cables	Power supply: Built-in auto-sensing 100-240 V AC Cable: 300 cm (9.8 ft)
Environmental	Operating temperature: 0 to 35° C Storage temperature: -40 to 60° C Humidity: 10 to 95%
Security	File-based encryption: AES-256 Data encryption: Symmetric Keys, PKI Device identity: Protected by device attestation Device access: Authenticated using API Key protection: Arm TrustZone, RPMB
Package Contents	Rally Board 65 Main device Tabletop legs (2) Power cord Stylus (2) VESA 100 PC mount Cable hook Assembly hardware and tools Documentation Cart Hub Assembly Shelf Assembly Rotation Arms (2) Legs with Casters (2) Logo Back Panels (2) Hub Covers (2) Leg Mounting Bolts (8) Shelf Mounting Bolts (4) Rotation Arm Mounting Bolts (12) Rotation Arm Keystone Bolts (2) H5 and H6 Hex Keys Documentation
Warranty Information	2-Year Limited Hardware Warranty 1-Year and 3-Year Extended Warranty available for purchase
Accessories	Rally Board 65 Cart Active USB Cable
Part Numbers	Graphite: 991-000561 Off-white: 991-000562



www.logitech.com/RallyBoard65

Contact your reseller
Or contact us at
www.logitech.com/business

Logitech Americas
3930 North First St
San Jose, CA 95134 USA

Logitech Europe S.A.
EPFL - Quartier de l'Innovation
Daniel Borel Innovation Center
CH - 1015 Lausanne

Logitech Asia Pacific Ltd.
Tel : 852-2821-5900
Fax : 852-2520-2230

© 2025 LOGITECH, the LOGITECH logo, the Logi logo, the NEXT LIFE PLASTICS logo, the RECYCLED PLASTIC logo and RALLY BOARD are trademarks or registered trademarks of Logitech Europe S.A. and/or its affiliates in the U.S. and other countries.

Published June 2025