

DATASHEET

Rally Camera Extension Kit

Single category cable connectivity for Logitech Rally Camera

Enables flexible placement of Rally Camera using a single category cable* up to 100 meters in length. Place the camera virtually anywhere in the room so it can better capture speakers and presentations.




Single cable connectivity

Extend Rally Camera connections up to 100 m* using a category cable from the camera side base to the control side box.

**See "Category Cable Support" below.*

One room, multiple views

Place camera virtually anywhere in the room using a cable cut to your desired length.

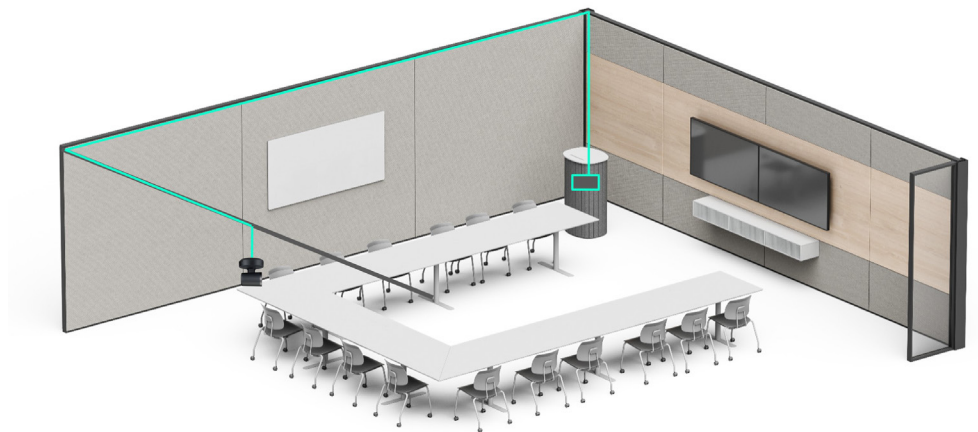

Clean cables, tight connections

Easily route the camera base cable and secure Rally Camera via the integrated screw. Route the category cable cleanly in the camera base to your mounting solution.

Simplify multi-camera setups

Using Rally Camera Extension Kit enables easy and flexible setups of multi-camera experiences with Microsoft Teams, Zoom, Google, and other providers in USB-based deployments.

Dimensions	<p>Camera side base Diameter: 153.3 mm (6.04 in) Height: 31.5 mm (1.24 in) Weight: 255.8 g (9.02 oz)</p> <p>Control side box Length: 134.7 mm (5.30 in) Width: 117.2 mm (4.61 in) Height: 22.8 mm (0.90 in) Weight: 137.5 g (4.85 oz)</p> <p>Twist-to-lock mount plate Diameter: 137.6 mm (5.42 in) Height: 18.6 mm (0.73 in) Weight: 42.1 g (1.49 oz)</p>	Ports and Interfaces	<p>Camera side base Integrated USB-C cable (from camera side base to Rally Camera) RJ45 to control side box LED status indicator</p> <p>Front: Reboot button LED status indicator</p> <p>Rear: USB-C (from control side box to user device) RJ45 to camera side base DC power connection Built-in cable retention Mounting slots</p>
System Requirements	Requires Rally Camera Windows 10 and higher macOS: two most recent versions USB 2.0 compatible devices	Mounts	<p>Camera side base VESA: 75 x 75 mm Tripod: 5/8-27 and 1/4-20 Twist-to-lock: for mounting directly to twist-to-lock mounting plate</p> <p>Control side box Mounting slots: 2 through-slots for mounting directly to the wall, table, or shelf</p>
Category Cable Support	Cat5e or better with cable diameter up to 7.4 mm, up to 100 meters in length. Performance and length supported will vary by cable.	Warranty Information	2-Year Limited Hardware Warranty 1-Year and 3-Year Extended Warranty available for purchase
Package Contents	Camera side base Control side box Twist-to-lock mounting plate Power adapter with regional plugs USB-C to USB-C cable with USB-C to USB-A adapter (length 2 m) 5/8-27 to 1/4-20 threaded adapter	Part Numbers	Worldwide: 952-000217 China: 952-000218 Japan: 952-000219
Power and Cables	Power supply Operating voltage/power: 100-240V, 48V, 1.0A Power supply dimensions: 68.9 x 33.9 x 71.3 mm (2.71 x 1.33 x 2.81 in) DC cable: 1.5 m (5 ft) USB-C to USB-C 2.1 cable: 2 m (6.56 ft) USB-C to USB-A 2.1 adapter: 37 mm (1.46 in)		



Contact your reseller
or contact us at
www.logitech.com/business

Logitech Americas
3930 North First St
San Jose, CA 95134 USA

Logitech Europe S.A.
EPFL - Quartier de l'Innovation
Daniel Borel Innovation Center
CH - 1015 Lausanne

Logitech Asia Pacific Ltd.
Tel : 852-2821-5900
Fax : 852-2520-2230

© 2025 Logitech. Logitech and the Logitech logo are trademarks of Logitech Europe S.A. and/or its affiliates in the U.S. and other countries. Google is a trademark of Google LLC. Microsoft Teams is a trademark of the Microsoft Corporation. Zoom is a trademark of Zoom Video Communications, Inc. All other third-party trademarks are the property of their respective owners.

Published March 2025