
# **SIMPLE SETUP**

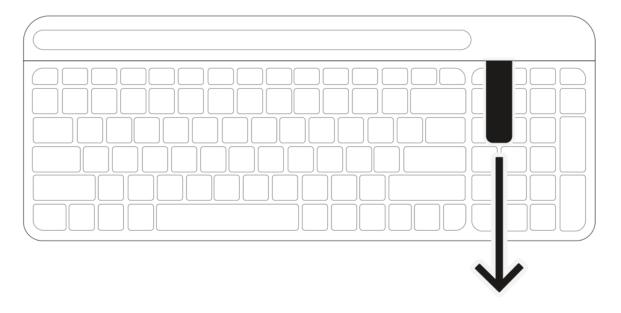


### STEP 1

### Remove Pull-Tab

First, pull the tab from your keyboard. Your keyboard will automatically turn on. Channel 1 will be ready to pair via either the USB receiver or via *Bluetooth*.

# **SIMPLE SETUP**

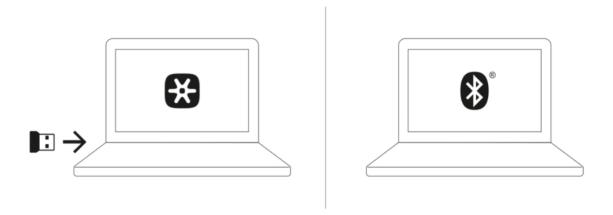


#### STEP 2

#### **Enter Pairing Mode**

Connect via the USB receiver: Get the USB Unifying receiver from the compartment inside the battery door. Insert the receiver into any available USB port on your laptop or tablet.

Connect via *Bluetooth*: Open the *Bluetooth* preferences on your device. Add a new peripheral by selecting "Logi K580 Keyboard." A code will appear onscreen. On your keyboard, type the code provided, and your keyboard will be ready to use.

## **SIMPLE SETUP**

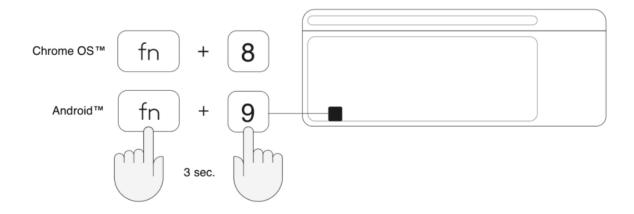

#### STEP 3

#### Select Your Operating System

Chrome OS is the default operating system layout. To switch to Android layout on your keyboard, press FN and "9" keys simultaneously and hold for 3 seconds. The LED on selected channel key will light up to show that the OS has been successfully changed. To switch back to Chrome OS layout, long press the FN and "8" keys simultaneously for 3 seconds. After selecting the OS layout, your keyboard is ready to use.

View the section below for additional setup tips or visit  $\underline{logitech.com/support/k580}$  for support.