

KEYS-TO-GO

Ultra-portable keyboard

Setup Guide | 설치 가이드
設定指南




logitech®

CONTENTS

English	3	繁體中文	19
한국어	11		


KNOW YOUR PRODUCT

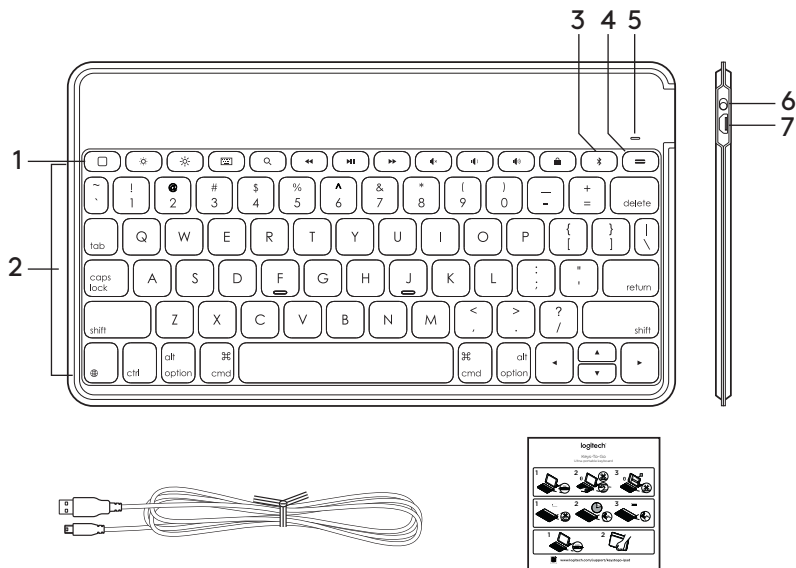

1. Hot keys
2. Keyboard
3. *Bluetooth*® connect key
4. Battery check key
5. *Bluetooth* and battery status light
6. On/off switch
7. Micro-USB charging port
8. Micro-USB charging cable
9. Documentation

SET UP YOUR PRODUCT


1. Turn on the keyboard:



Bluetooth discovery starts automatically and continues for 15 minutes. The status light blinks blue.

If the status light briefly turns red, charge the battery. For more information, see "Charge the battery."

2. Establish *Bluetooth* connection:



On your *iPad*, make sure *Bluetooth* is on. Select Settings > *Bluetooth* > On.


Select "Keys-To-Go" from the Devices menu.

Tip: If "Keys-To-Go" isn't in the list, try pressing and holding the *Bluetooth* connect key on your keyboard for 2 seconds.

CHARGE THE BATTERY

You should charge the battery when:


- the status light turns red briefly when you turn on the keyboard, or
- the status light blinks red when you press the battery check key:

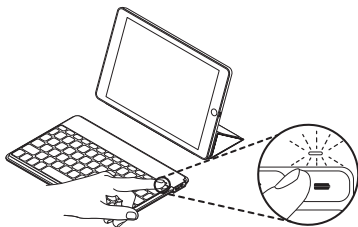

A fully charged battery provides about 3 months of power when the keyboard is used about two hours a day.

Charging your battery

1. Use the micro-USB charging cable provided to connect the keyboard to your computer or a USB power adaptor. The status light blinks green while the keyboard is charging.

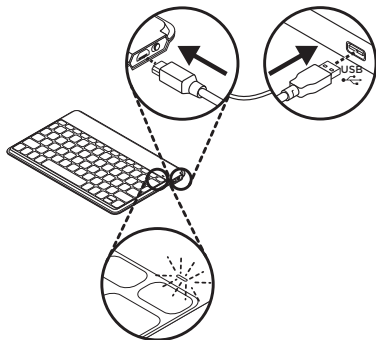

2. Charge your keyboard until the status light turns solid green.

Each minute of charging gives you about two hours' use.

Note: This ratio is approximate and is based on the standard user experience. Your result may vary.

It takes 2.5 hours to fully charge the battery.

HOT KEYS



Home = iPad Home screen



Screen brightness down



Screen brightness up



Virtual keyboard

Shows/hides the virtual keyboard



Search

Type keywords in the search bar for contacts, music, notes, events, mail, web, Wikipedia, and more



Previous track



Play/Pause



Next track



Mute



Volume down



Volume up



Screen lock



Bluetooth connect



Battery check




Switch language

Switches the keyboard language

USE YOUR PRODUCT


Status light indications



Light	Description
Blinking green	The battery is charging.
Solid green	When charging, indicates that the battery is fully charged (100%). When you press the battery check key, solid green for 2 seconds indicates that the battery power is good (above 20%).
Blinking red	Battery power is low (less than 20%). Recharge the battery.
Solid red	When you first turn on your keyboard, the status light shows solid red briefly if battery power is low.
Blinking blue	Fast: The keyboard is in discovery mode, ready for pairing. Slow: The keyboard is trying to reconnect to your iPad.
Solid blue	Bluetooth pairing or reconnection is successful.


Connecting to a different iPadOS device

1. Make sure the keyboard is turned on.
2. On your iPadOS device, check that *Bluetooth* is turned on. Select *Settings > Bluetooth > On*.
3. Press and hold the *Bluetooth* connect key on the keyboard for 2 seconds. The keyboard turns discoverable for 3 minutes.
4. Select “Keys-To-Go” from the Devices menu.



WHEN YOU'VE FINISHED USING YOUR PRODUCT

When not in use, turn off the keyboard to conserve battery power.

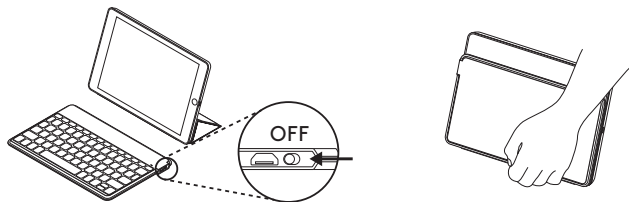


Note:


The keyboard enters sleep mode if powered on and not used for 2 hours.
To exit sleep mode, press any key.

BATTERY DISPOSAL AT PRODUCT END OF LIFE


1. Cut along the fabric at the top edge of the keyboard:

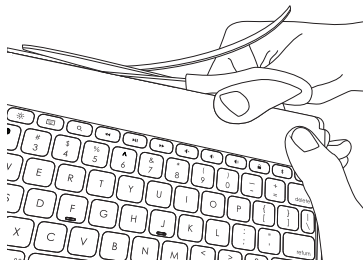


2. Use a screwdriver to pry the fabric away from the area around the on/off switch:

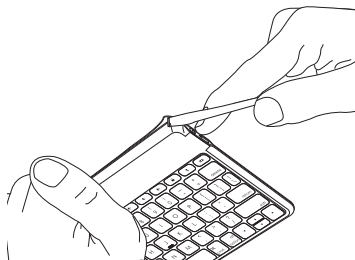

3. Separate the inner and outer fabric layers, and pull them away from the corner:



4. Pull back the yellow plate to reveal the battery and remove it:



5. Dispose of the battery according to local laws.

Visit Product Support

There's more information and support online for your product. Take a moment to visit Product Support to learn more about your new *Bluetooth* keyboard.

Browse online articles for setup help, usage tips, and information about additional features.

If your *Bluetooth* keyboard has optional software, learn about its benefits and how it can help you customize your product.

Connect with other users in our Community Forums to get advice, ask questions, and share solutions.

At Product Support, you'll find a wide selection of content including:

- Tutorials
- Troubleshooting
- Support community
- Online documentation
- Warranty information
- Spare parts (when available)

Go to:

www.logitech.com/support/keystogo-ipad

Troubleshooting

The keyboard does not work



- Press any key to wake the keyboard from sleep mode.
- Turn the keyboard Off and then back On.
- Recharge the internal battery. For more information, see "Charge the battery."
- Re-establish the *Bluetooth* connection between the keyboard and your *iPad*:
 - On your *iPad*, check that *Bluetooth* is turned on.
 - Press and hold the *Bluetooth* connect key on your keyboard for 2 seconds.
 - Choose "Keys-To-Go" from the Devices menu on your *iPad*. The status light briefly turns blue after the *Bluetooth* connection is made.

What do you think?

Thank you for purchasing our product.
Please take a minute to tell us what you think of it.

www.logitech.com/ithink

제품 설명

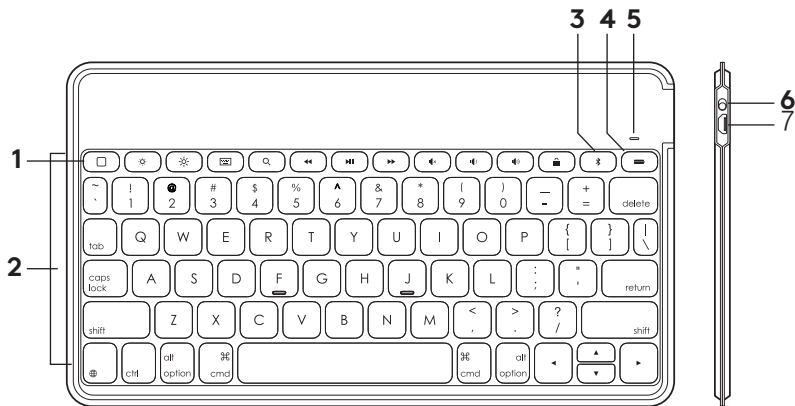


1. 바로 가기 키
2. 키보드
3. Bluetooth® 연결 키
4. 배터리 확인 키
5. Bluetooth® 및 배터리 상태 표시등

6. 커기/끄기 스위치
7. 마이크로 USB 충전 포트
8. 마이크로 USB 충전 케이블
9. 사용 설명서

제품 설정


1. 키보드를 켭니다.



Bluetooth가 자동으로 검색되며 15분 동안 계속 됩니다. 상태 표시등이 파란색으로 깜박입니다.

상태 표시등이 잠시 빨간색으로 바뀌면 배터리를 충전하세요. 자세한 내용은 "배터리 충전"을 참조하세요.

2. Bluetooth 연결 설정:



iPad에서 Bluetooth가 켜져 있는지 확인합니다. 설정 > Bluetooth > 켜기를 선택합니다.


장치 메뉴에서 "Keys-To-Go"를 선택합니다.

팁: "Keys-To-Go"가 목록에 없으면 키보드의 Bluetooth 연결 키를 2초 동안 길게 누릅니다.

배터리 충전

다음과 같은 경우 배터리를 충전해야 합니다.


- 키보드를 켜고 있을 때 상태 표시등이 빨간색으로 바뀌는 경우
- 배터리 확인 키를 누르면 상태 표시등이 빨간색으로 깜박이는 경우:

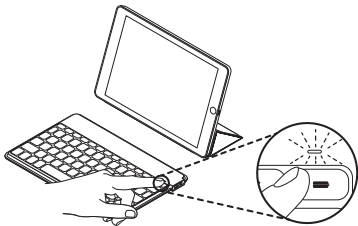

완충 시, 하루 2시간 사용 기준으로 최대 3개월간 사용할 수 있습니다.

배터리 충전

1. 제공된 마이크로 USB 충전 케이블을 사용하여 키보드를 컴퓨터 또는 USB 전원 어댑터에 연결합니다. 키보드가 충전되는 동안 상태 표시등이 녹색으로 깜박입니다.

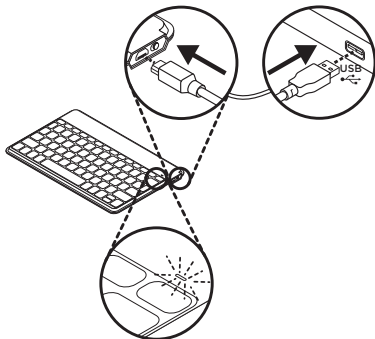

2. 상태 표시등이 녹색으로 유지될 때까지 키보드를 충전합니다.

1분 충전으로 약 2시간 동안 사용할 수 있습니다.

참고: 배터리 수명은 컴퓨터 사용 환경에 따라 다를 수 있습니다.

배터리를 완전히 충전하려면 2.5시간이 걸립니다.


단축 키

-  **흔들 = iPad 흔들 화면**
-  **화면 밝기 감소**
-  **화면 밝기 증가**
-  **화상 키보드**
화상키보드 표시/숨기기
-  **검색**
iOS 검색창 불러오기
-  **이전 트랙**
-  **재생/일시 중지**
-  **다음 트랙**

-  **음소거**
-  **볼륨 줄이기**
-  **볼륨 높이기**
-  **화면 잠금**
-  **Bluetooth 연결**
-  **배터리 확인**
-  **언어 전환**
키보드 언어 전환

제품 사용


상태 표시등



표시등	설명
녹색으로 깜박임	배터리가 충전 중입니다.
녹색으로 유지	충전 중에 배터리가 완전히 충전(100%) 되었음을 나타냅니다. 배터리 확인 키를 눌렀을 때 표시등이 2초 동안 녹색으로 유지되면 배터리 잔량이 양호한 것입니다(20% 이상).
빨간색으로 깜박임	배터리 잔량이 부족합니다(20% 미만). 배터리를 충전합니다.
빨간색으로 유지	키보드를 처음 켤 때 배터리 전원이 부족하면 상태 표시등이 잠시 빨간색으로 표시됩니다.
파란색으로 깜박임	빠름: 키보드가 검색 모드이며 페어링할 준비가 되었습니다. 느림: 키보드가 iPad에 재연결을 시도하고 있습니다.
파란색으로 유지	Bluetooth 페어링 또는 연결이 성공적으로 완료되었습니다.


다른 iPadOS 장치에 연결

1. 키보드가 켜져 있는지 확인합니다.
2. iPadOS 장치에서 Bluetooth가 켜져 있는지 확인합니다. 설정 > Bluetooth > 기기들 선택합니다.
3. 키보드의 Bluetooth 연결 키를 2초 동안 길게 누릅니다. 키보드는 3분 동안 검색 가능합니다.
4. 장치 메뉴에서 "Keys-To-Go"를 선택합니다.



제품 사용을 마친 경우

사용하지 않을 때는 키보드를 꺼서 배터리 전원을 절약합니다.

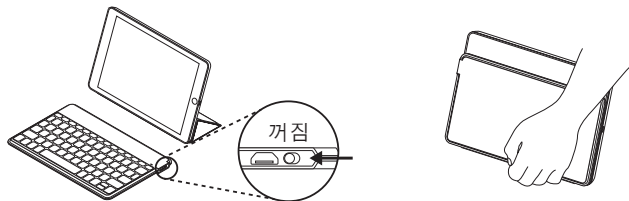


참고:


키보드는 전원이 켜진 상태로 2시간 동안 사용하지 않으면 절전 모드로 전환됩니다.
아무 키나 누르면 절전 모드가 종료됩니다.

수명이 다한 배터리 폐기


1. 키보드 상단 가장자리를 따라 천 자르기:

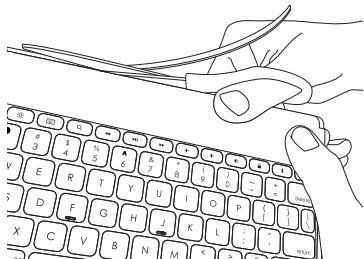


2. 스크루드라이버를 사용하여 커기/끄기 스위치 주변에서 천을 들어 올립니다.

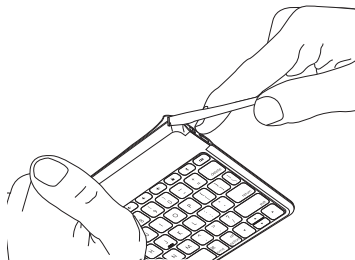

3. 안쪽 천과 바깥쪽 천을 분리하고 모서리에서 당겨 빼냅니다.



4. 노란색 플레이트를 뒤로 당기고 보이는 배터리를 분리합니다.



5. 해당 지역의 법규에 따라 배터리를 폐기합니다.

온라인 지원

온라인상에서 제품에 대한 추가 정보와 지원을 확인할 수 있습니다. 제품 지원에는 새로운 **Bluetooth** 키보드에 관한 자세한 내용이 나와 있습니다.

설정 도움말, 사용 팁 및 추가 기능에 관한 정보를 온라인으로 찾아볼 수 있습니다. 사용 중인 **Bluetooth** 키보드에 옵션 소프트웨어가 있는 경우, 해당 소프트웨어의 이점과 소프트웨어를 사용한 제품 커스터마이징 방법을 확인해보세요.

Community Forums에서 다른 사용자와 교류하면서 질문과 의견을 교환하고 솔루션을 공유할 수 있습니다.

제품 지원에서는 다음을 비롯한 폭넓은 내용을 선택할 수 있습니다.

- 사용 지침
- 문제 해결
- 지원 커뮤니티
- 온라인 문서
- 보증 정보
- 예비 부품(해당되는 경우)

이동:

www.logitech.com/support/keystogo-ipad

문제 해결

키보드가 작동하지 않음


- 슬립 모드에서는 아무 키나 누르면 키보드가 재작동됩니다.
- 키보드를 끈 다음 다시 켭니다.
- 내장 배터리를 충전합니다. 자세한 내용은 "배터리 충전"을 참조하세요.
- 키보드와 iPad 간의 **Bluetooth** 연결을 다시 설정합니다.
 - iPad에서 **Bluetooth**가 켜져 있는지 확인합니다.
 - 키보드의 **Bluetooth** 연결 키를 2초간 길게 누릅니다.
 - iPad 장치 메뉴에서 "**Keys-To-Go**"를 선택합니다. **Bluetooth** 연결이 완료되면 상태 표시등이 잠시 파란색으로 바뀝니다.

어떻게 생각하십니까?

로지텍 제품을 구입해 주셔서 감사합니다.
잠시 시간을 내셔서 귀하의 의견을 알려주세요.

www.logitech.com/ithink


瞭解您的產品

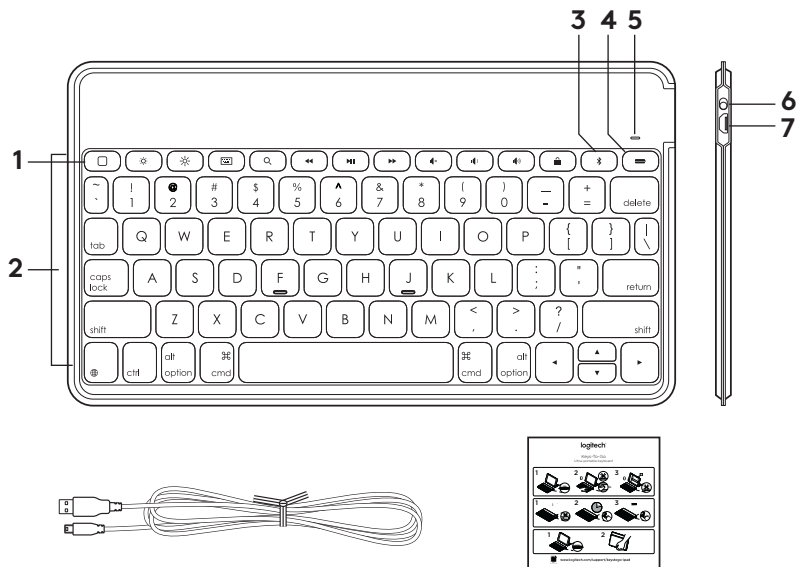

1. 快捷鍵
2. 鍵盤
3. 藍牙連線按鍵
4. 電池電量檢查按鍵
5. 藍牙和電池狀態指示燈
6. 開啟/關閉開關
7. Micro USB 充電連接埠
8. Micro-USB 充電連接線
9. 文件

設定您的產品


1. 開啓鍵盤電源：



藍牙探索會自動開始，並持續 15 分鐘。狀態指示燈閃爍藍燈。

如果狀態指示燈短暫亮起紅燈，請為電池充電。有關詳細資訊，請參閱「為電池充電」。

2. 建立藍牙連線：



在 iPad 上，確認藍牙已開啓。選擇「設定」>「藍牙」>「開啓」。


在「裝置」功能表中選擇「Keys-To-Go」。

提示：如果清單中沒有「Keys-To-Go」，請嘗試按住鍵盤上的藍牙連線按鍵 2 秒。

為電池充電

在有下列情況時，應為電池充電：


- 狀態指示燈在您開啓鍵盤電源時，短暫亮起紅燈，或
- 狀態指示燈在按下電池電量檢查鍵時閃爍紅燈：

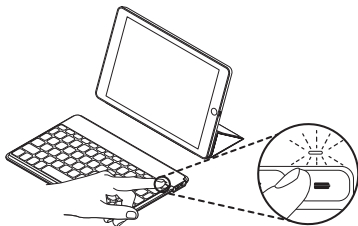

如果鍵盤每天使用約兩個小時，則充滿電量的電池可提供約 3 個月的電力。

為您的電池充電

1. 使用隨附的 micro-USB 充電連接線將鍵盤連接到您的電腦或 USB 電源轉接器。在鍵盤充電期間，狀態指示燈會閃爍綠燈。

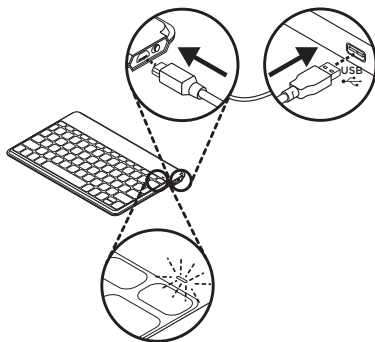

2. 持續為電池充電，直到狀態指示燈轉為穩定綠燈。

每充電一分鐘可讓您提供約兩小時的使用電力。

注意：此比率是根據標準使用者體驗的大約值。您的結果可能會有所不同。

電池完全充電約需花費 2.5 小時時間。

快捷鍵



Home = iPad 主畫面



減低螢幕亮度



增加螢幕亮度



虛擬鍵盤

顯示/隱藏虛擬鍵盤



搜尋

在搜索列中鍵入關鍵字，可搜索聯繫人、音樂、筆記、事件、郵件、網頁、維基百科等內容



上一曲目



播放/暫停



下一曲目



靜音



調低音量



增加音量



螢幕鎖定



藍牙連線




電池檢查



切換語言
切換鍵盤語言

使用您的產品


狀態指示燈



亮	說明
閃爍綠燈	電池正在充電。
穩定綠燈	充電時，這表示電池已完全充電 (100%)。 按下電池電量檢查鍵時，亮起穩定綠燈 2 秒表示電池電量良好 (超過 20%)。
閃爍紅燈	電池電量偏低 (低於 20%)。請為電池充電。
穩定紅燈	第一次開啓鍵盤電源時，如果電池電量偏低，狀態指示燈會短暫顯示穩定紅燈。
閃爍藍燈	快速閃爍：鍵盤處於搜索模式，準備配對。 慢速閃爍：鍵盤正在嘗試重新連線到 iPad。
穩定藍燈	藍牙配對或重新連線成功完成。


連線到不同的 iPadOS 裝置

1. 確認鍵盤電源已開啓。
2. 在 iPadOS 裝置上，檢查確認藍牙功能已經開啓。選擇「設定」>「藍牙」>「開啓」。
3. 按住鍵盤上的藍牙連線按鍵 2 秒。鍵盤在 3 分鐘內將處於可偵測狀態。
4. 在「裝置」功能表中選擇「Keys-To-Go」。



產品完成使用時

不使用時，請關閉鍵盤電源以節省電池電量。

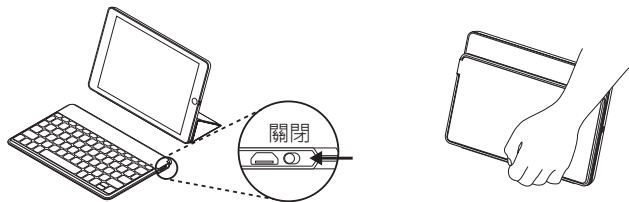


注意：

如果閒置不使用時間達 2 小時，鍵盤會進入休眠模式。


若要退出休眠模式，請按下任意按鍵。

產品使用壽命告終時的電池棄置指南


1. 沿鍵盤頂部邊緣的布料剪裁：

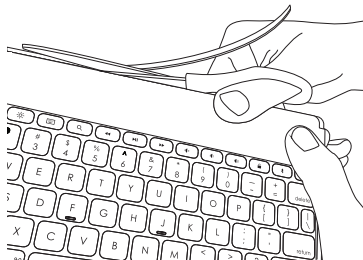


2. 使用螺絲起子將布料從開關周圍區域撬開：

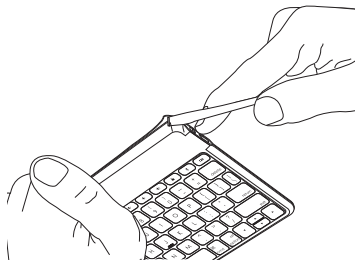

3. 將內外布料層分開，並將其從角落拉出：



4. 拉回黃色板以露出電池並將其取出：



5. 根據當地法律棄置電池。

造訪「產品支援」

我們的網站提供有關本產品的詳細資訊和支援服務。請抽時間造訪「產品支援」，瞭解關於新型藍牙鍵盤的更多資訊。

瀏覽線上文章，查看安裝說明、使用技巧以及更多功能資訊。如果藍牙鍵盤有選用軟體可用，請瞭解其優點以及其能如何協助您自訂產品。

您還可以和「社群論壇」中的其他使用者保持聯繫以獲得建議、提出問題，以及分享解決方案。

「產品支援」提供了廣泛的內容選擇，包括：

- 教程
- 疑難排解
- 支援社群
- 線上文件
- 保固資訊
- 備用零件（若有供應）

請至：

www.logitech.com/support/keystogo-ipad

疑難排解

鍵盤無法運作

- 按任意鍵即可將鍵盤從休眠模式中喚醒。
- 關閉鍵盤電源，然後再重新開啓電源。
- 為內部電池充電。有關詳細資訊，請參閱「為電池充電」。
- 重新建立鍵盤與 iPad 之間的藍牙連線。
 - 確認 iPad 的藍牙功能已開啓。
 - 按住鍵盤上的藍牙連線按鍵 2 秒。
 - 從 iPad 的「裝置」功能表中選擇「Keys-To-Go」。狀態指示燈在建立藍牙連線後，會短暫亮起藍燈。

您有任何寶貴意見想法嗎？

感謝您購買我們的產品。
請撥冗告訴我們您的意見。

www.logitech.com/ithink

www.logitech.com/support/keystogo-ipad

© 2022 Logitech. All rights reserved. Logitech, the Logitech logo, and other Logitech marks are owned by Logitech and may be registered. Apple and iPad Air are trademarks of Apple Inc., registered in the U.S. and other countries. The *Bluetooth*® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Logitech is under license. All other trademarks are the property of their respective owners. Logitech assumes no responsibility for any errors that may appear in this manual. Information contained herein is subject to change without notice.

WEB-621-000956 002